STether gain

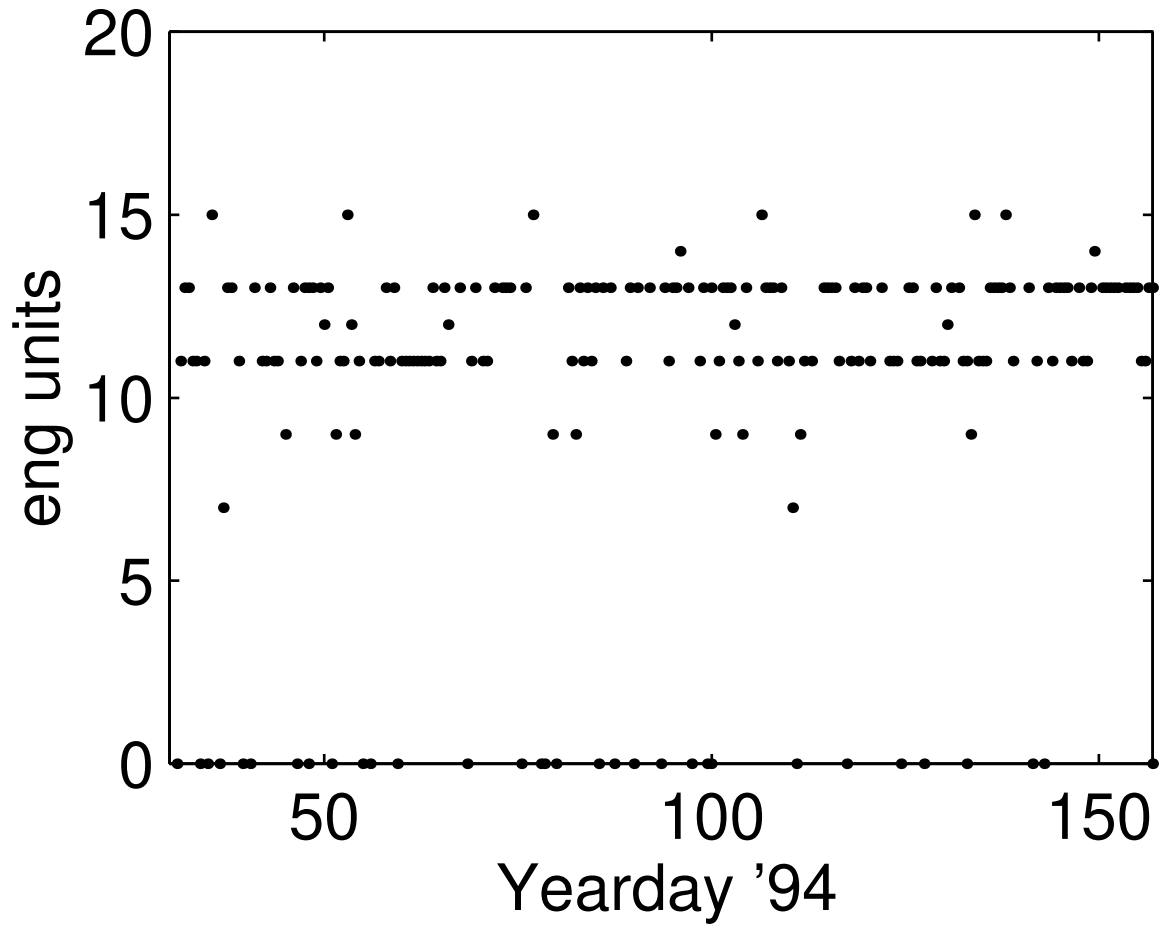

STether Ambient Noise

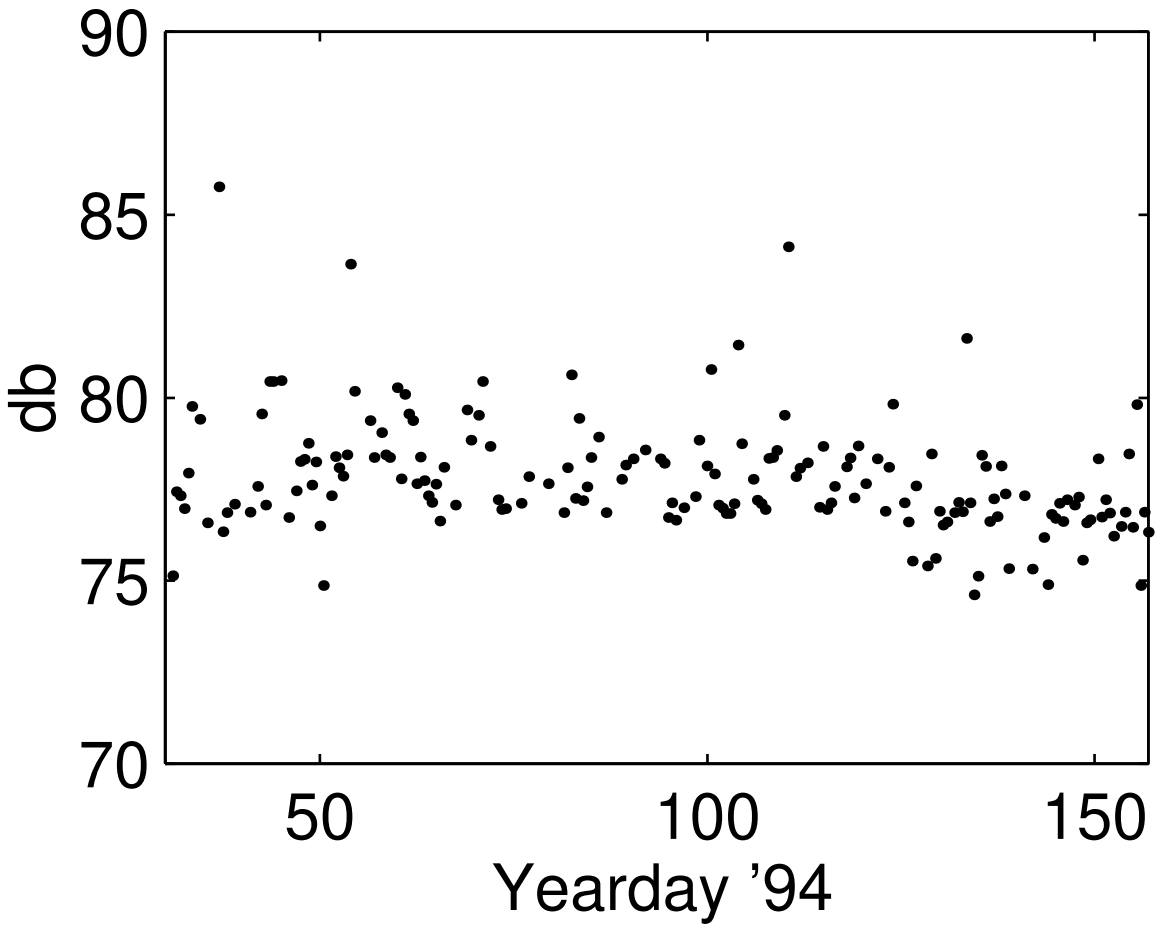

STether Internal Temperature

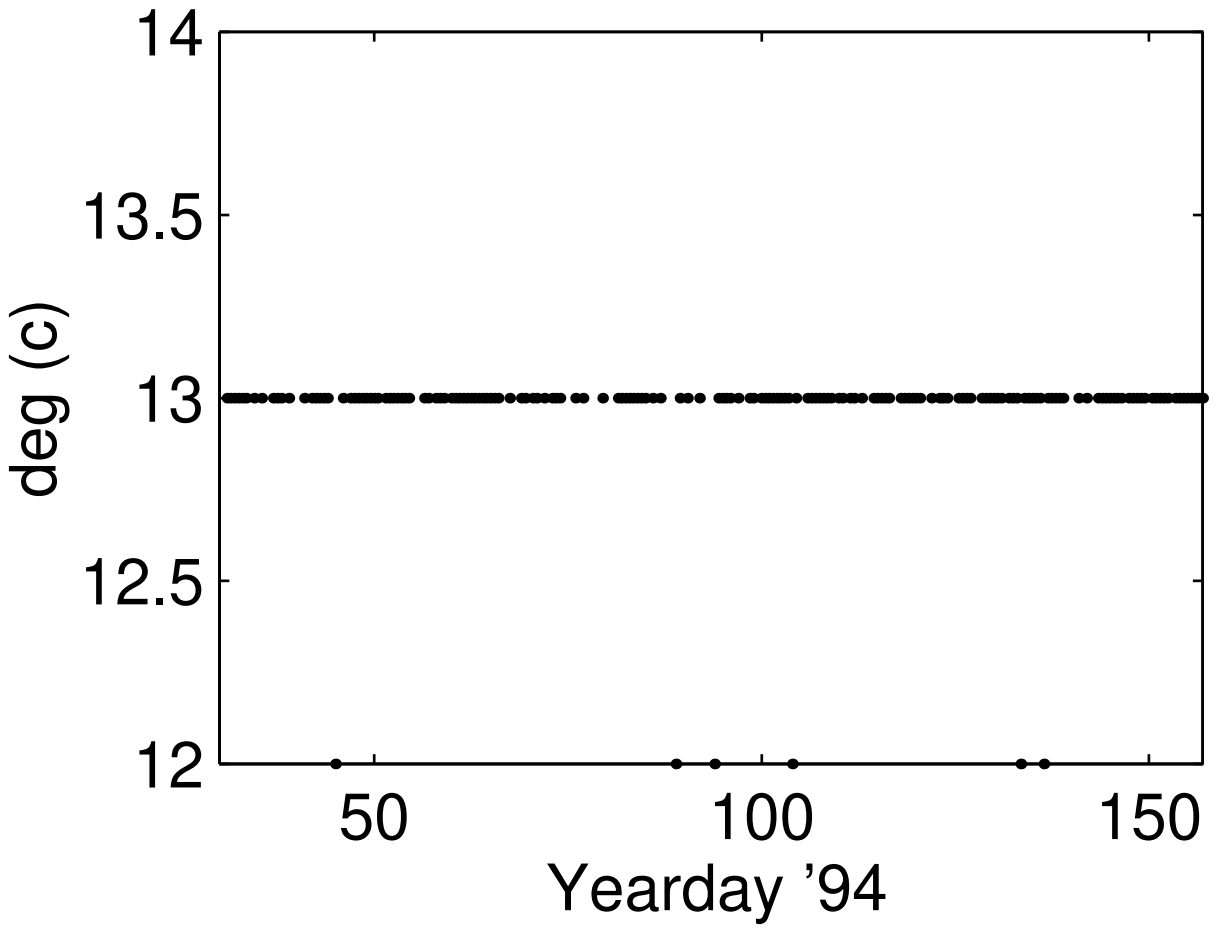

STether External Temperature

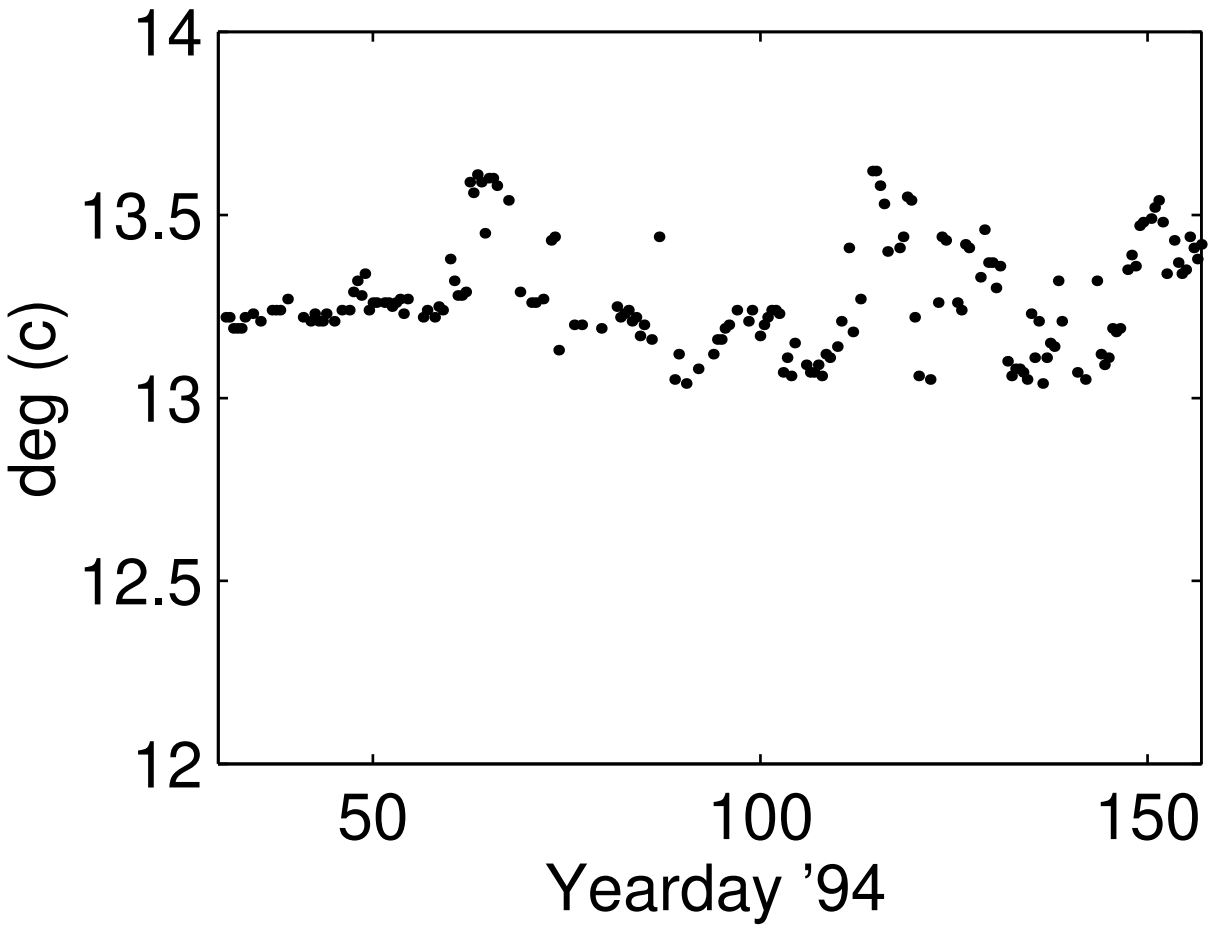

STether Internal Pressure

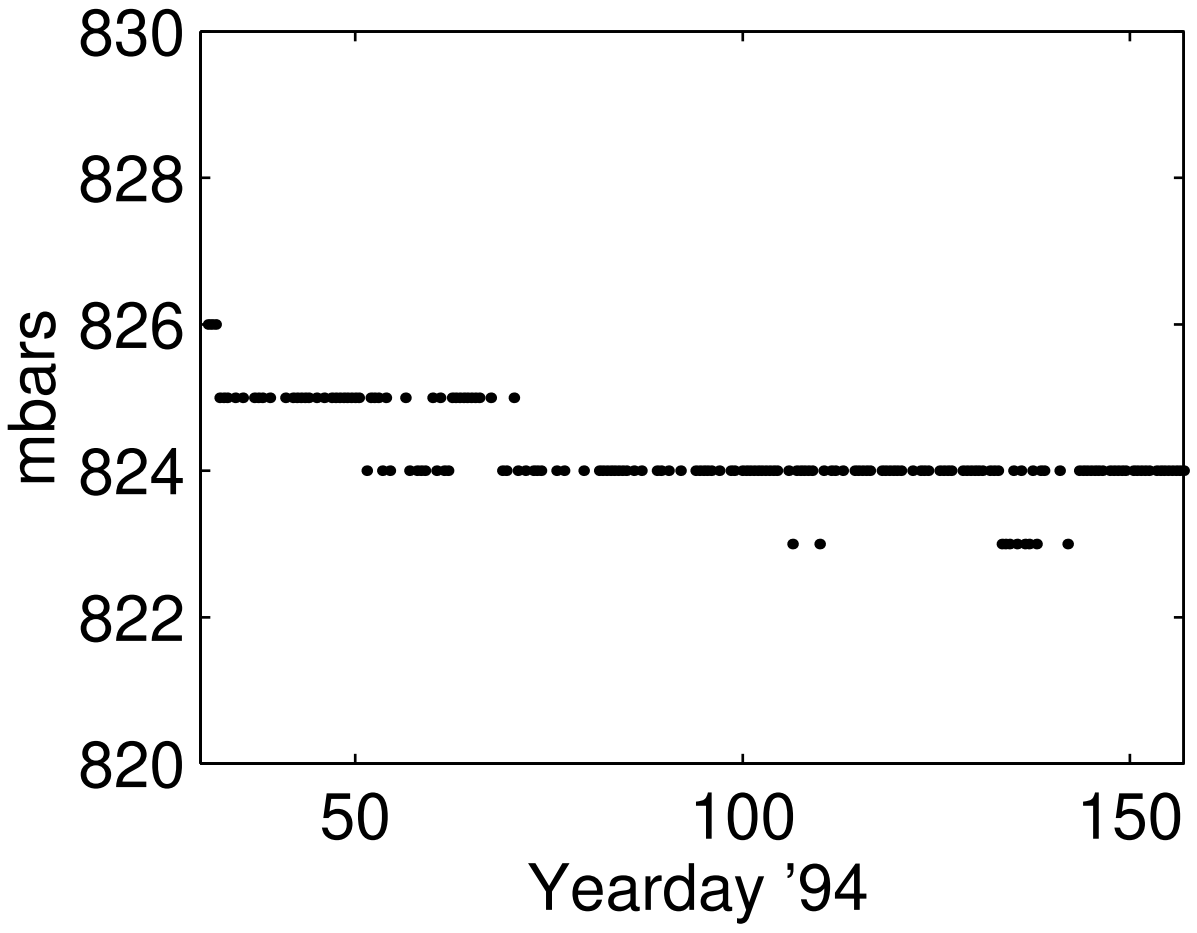

STether External Pressure

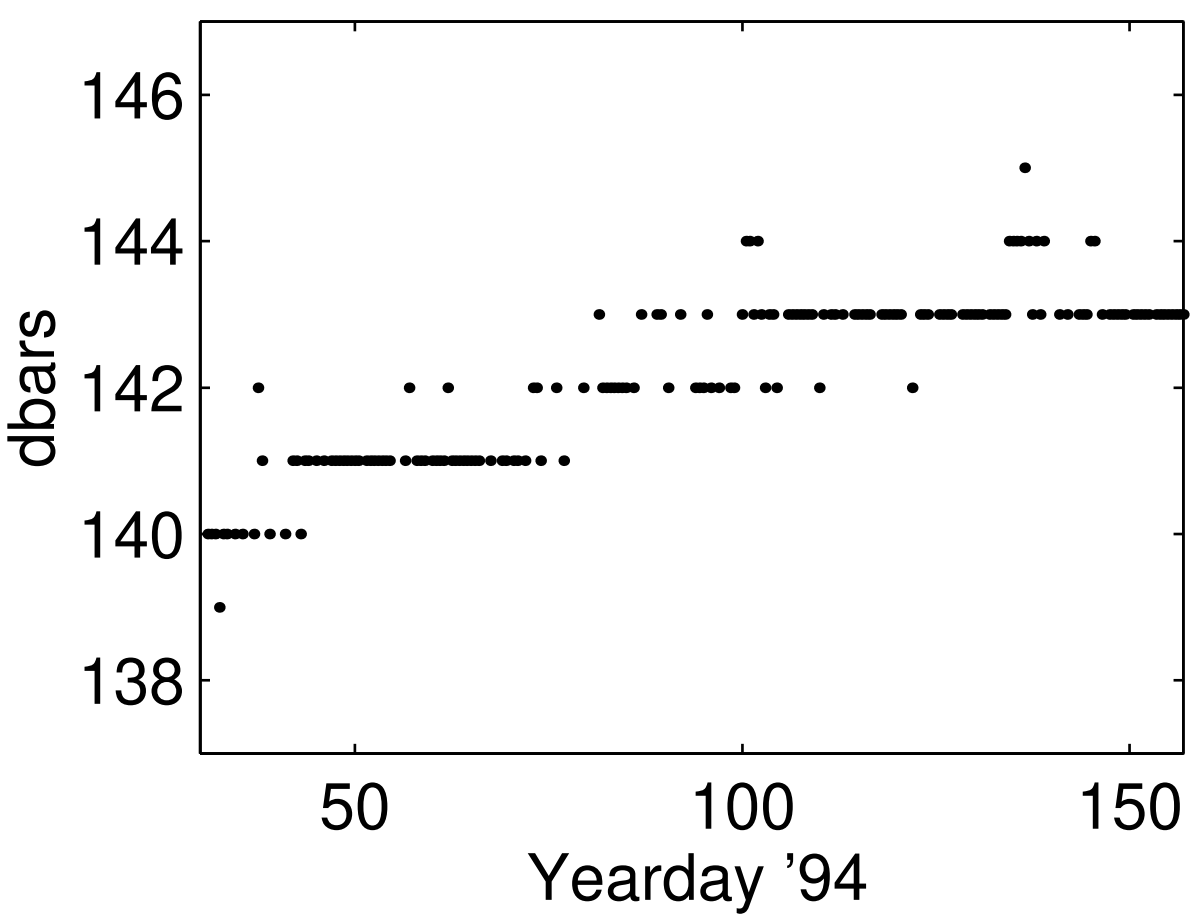

15–Jun–94

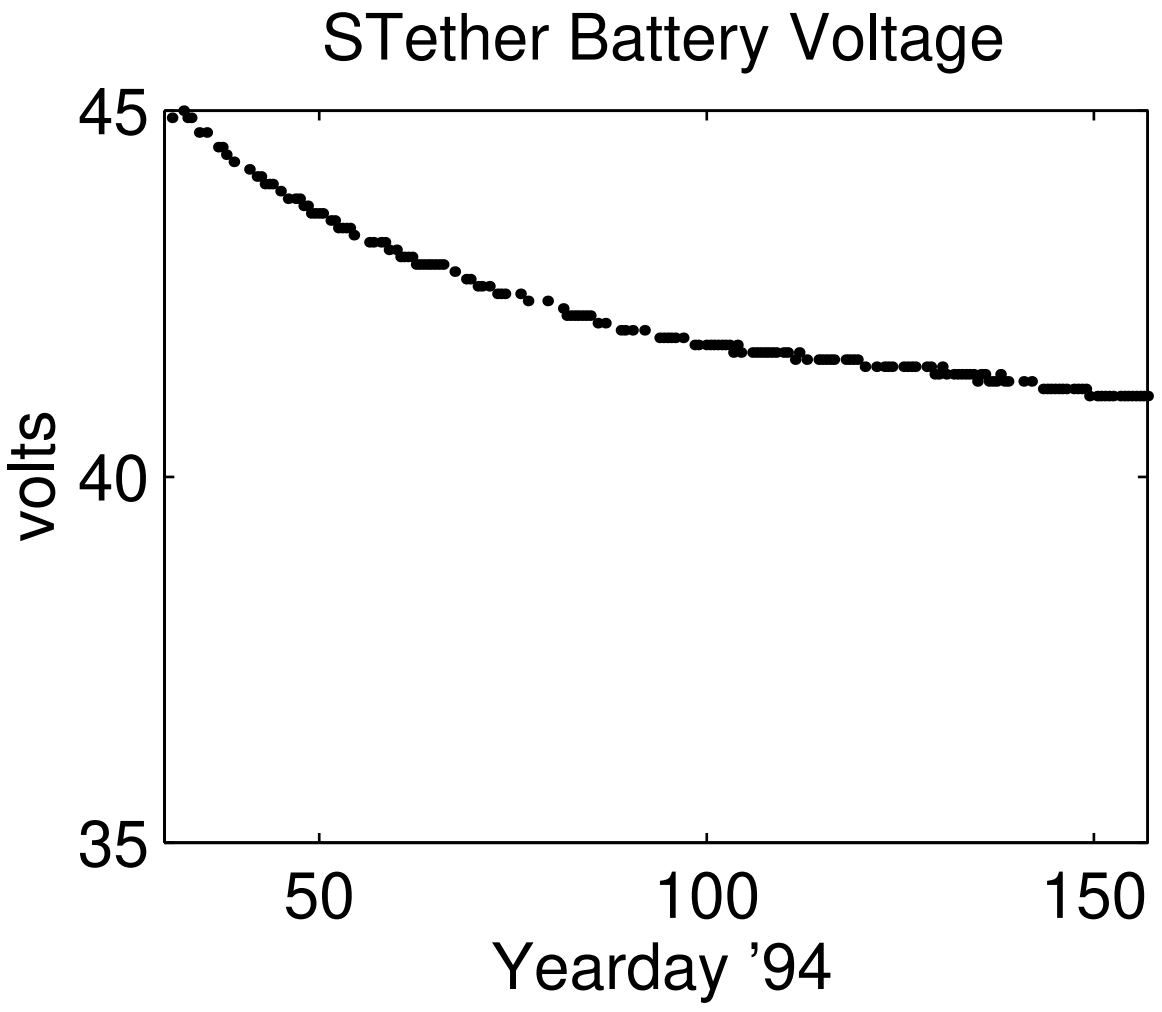
STether Battery Voltage
45
40
35
volts
50
100
150
Yearday '94

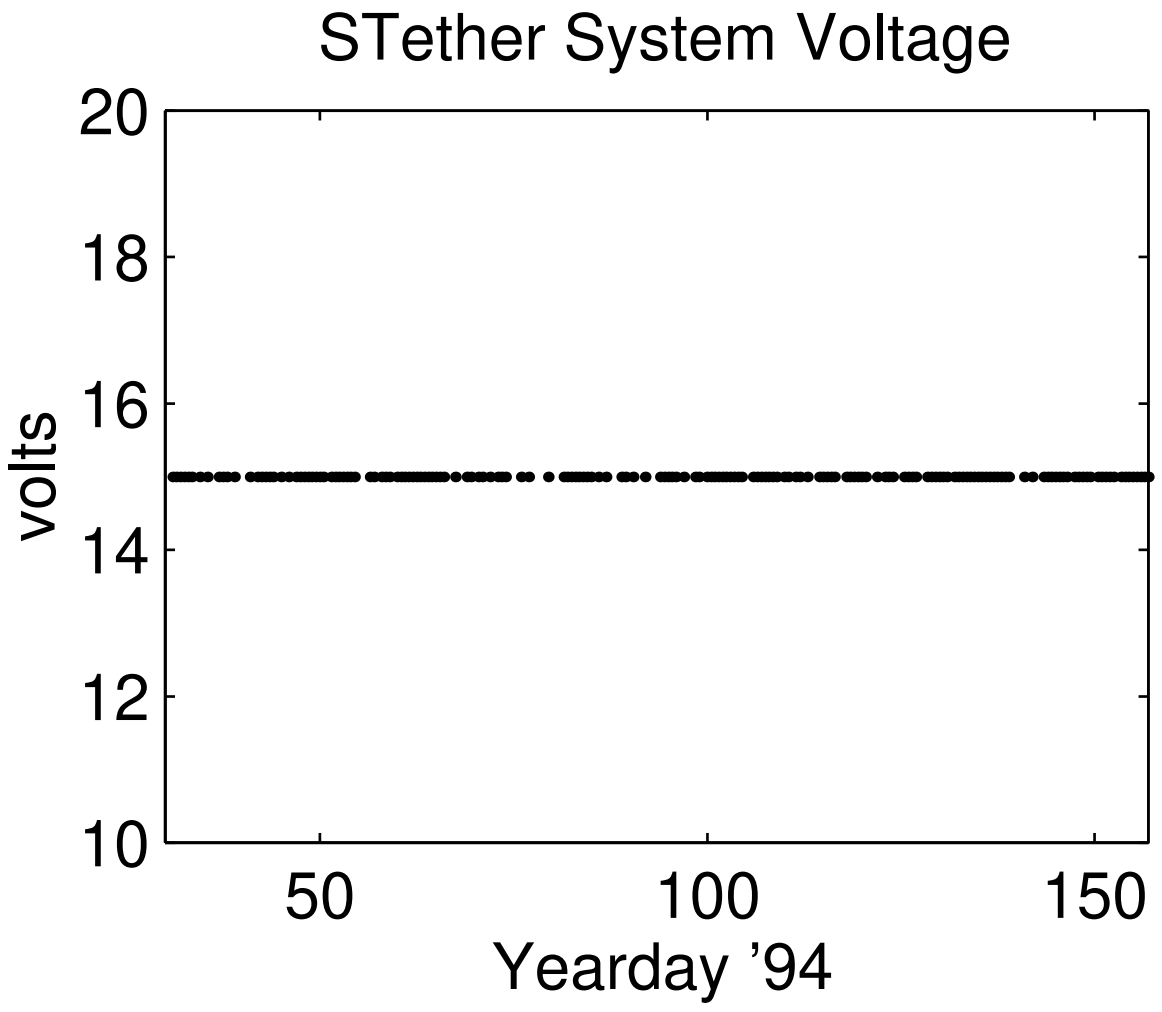
STether System Voltage
20
18
16
14
12
10
volts
50
100
150
Yearday '94

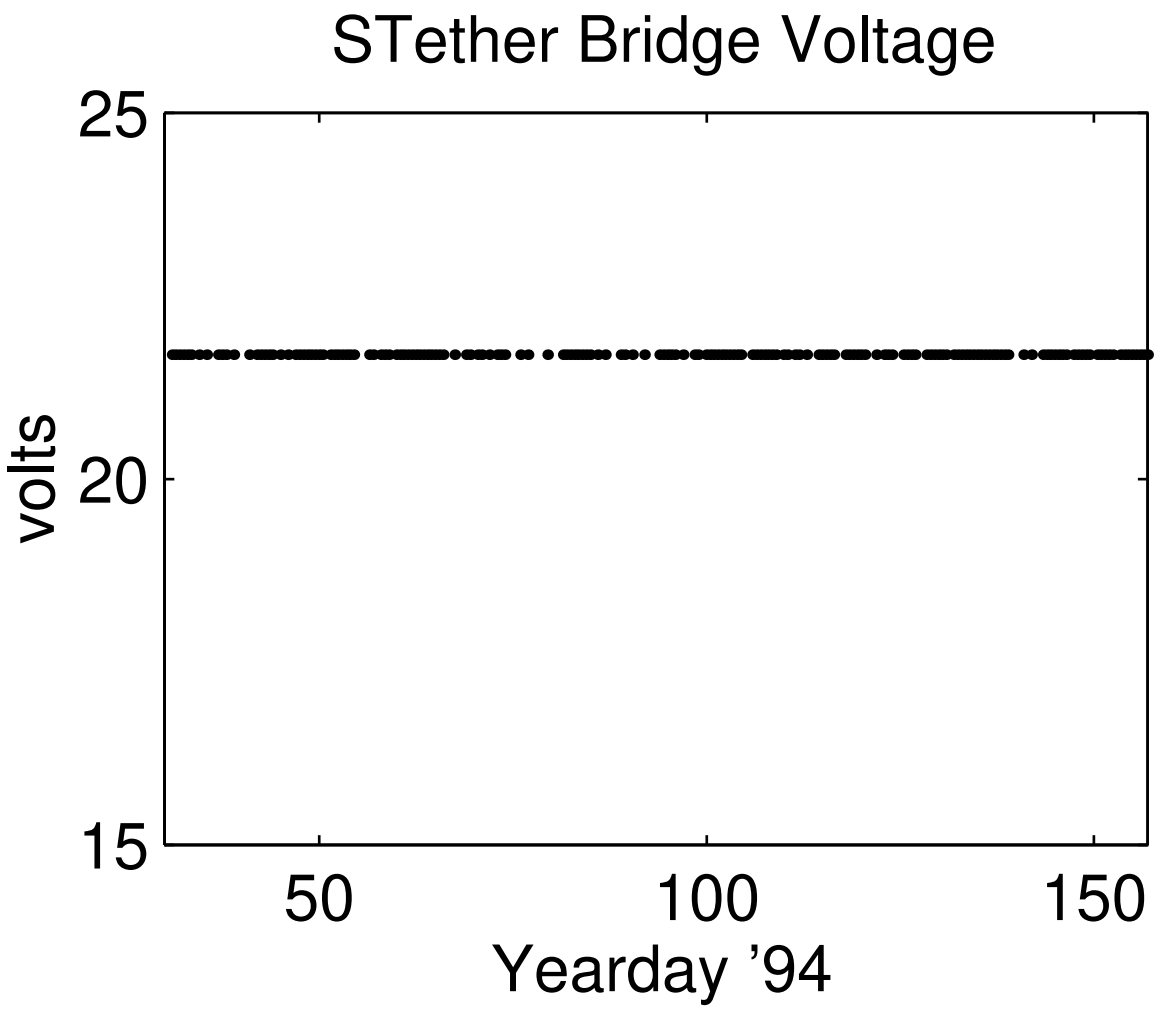
STether Bridge Voltage
25
20
15
volts
50
100
150
Yearday '94

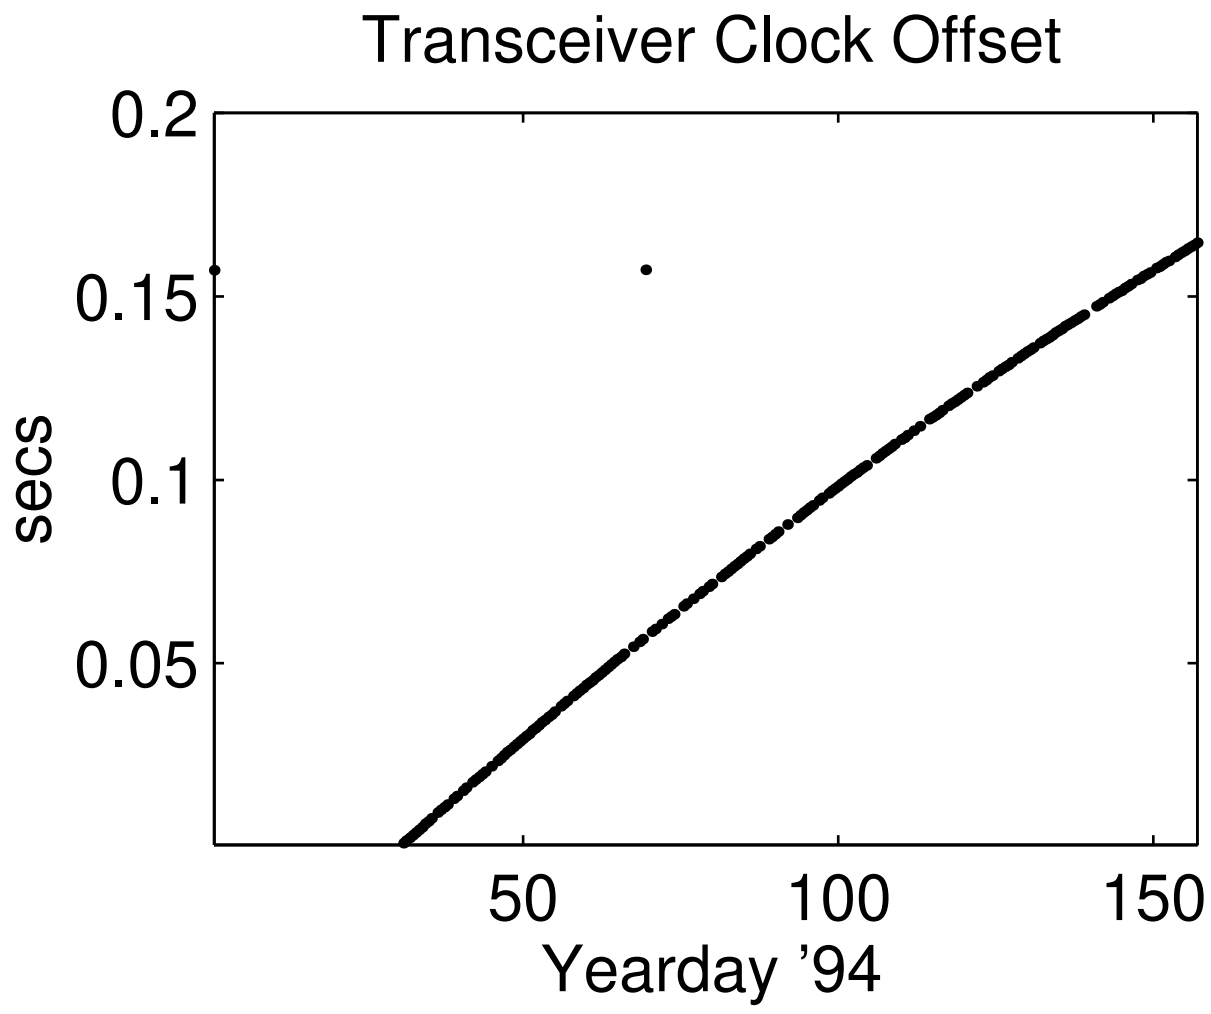
Transceiver Clock Offset
0.2
0.15
0.1
0.05
secs
50
100
150
Yearday '94

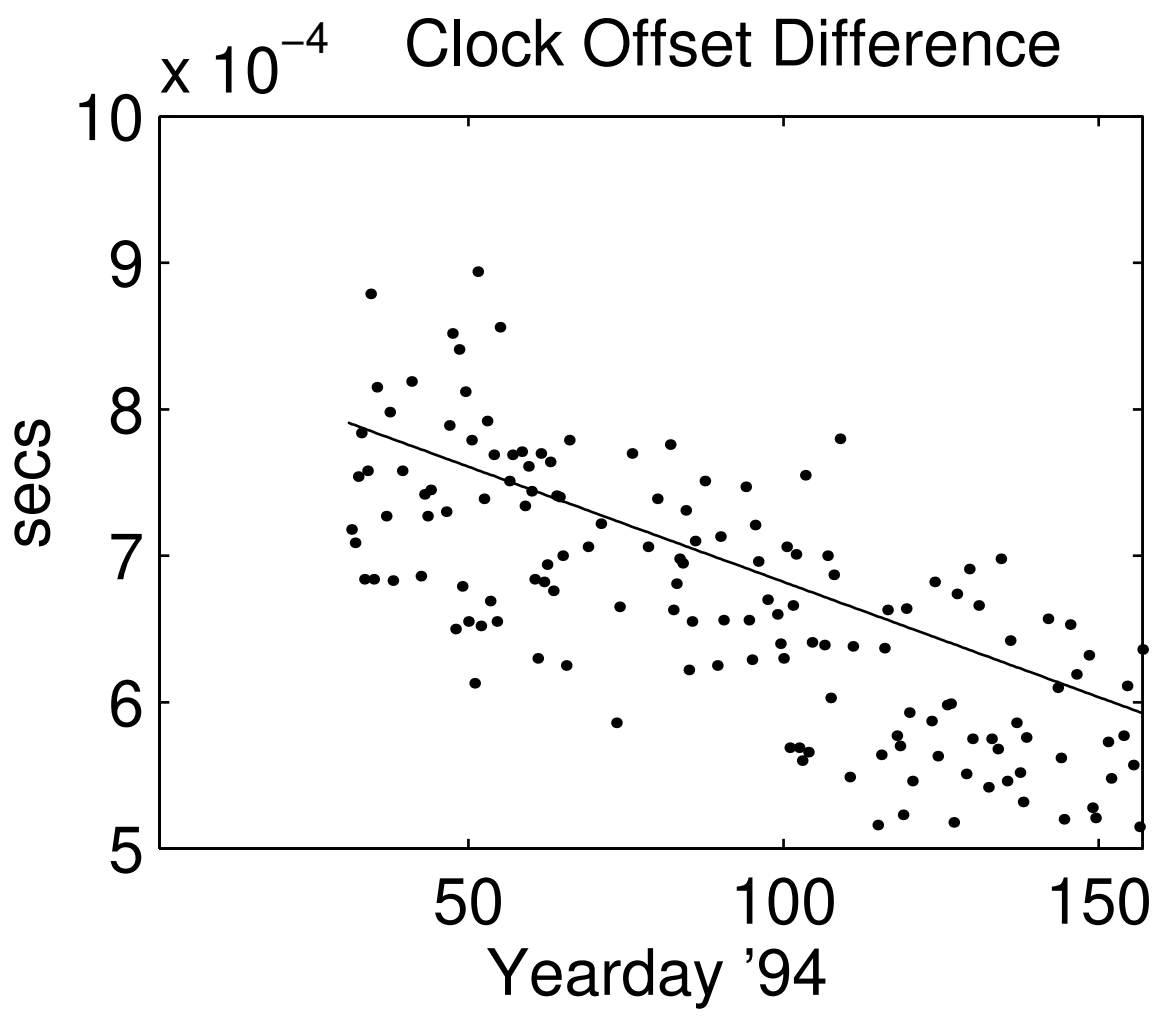
x 10^-4
Clock Offset Difference
10
9
8
7
6
5
secs
50
100
150
Yearday '94

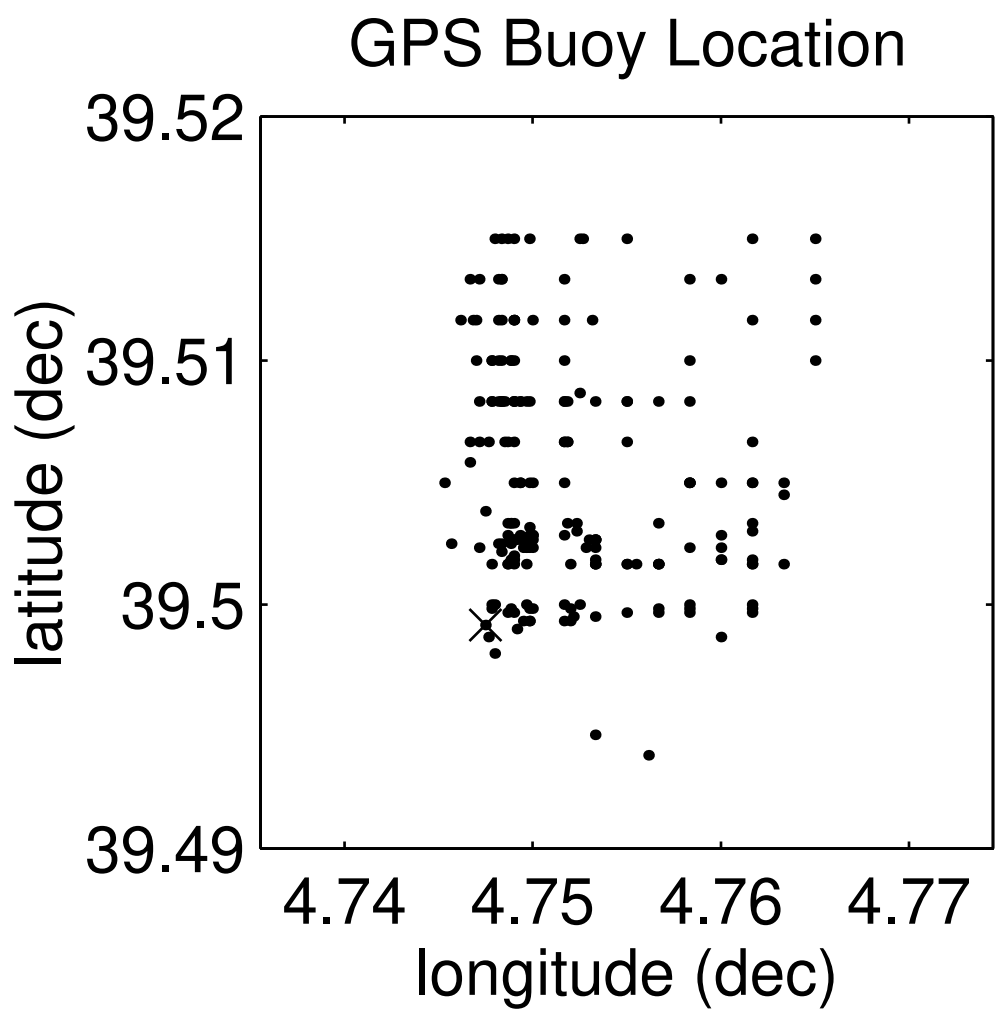
GPS Buoy Location
39.52
39.51
39.5
39.49
latitude (dec)
4.74
4.75
4.76
4.77
longitude (dec)

15–Jun–94

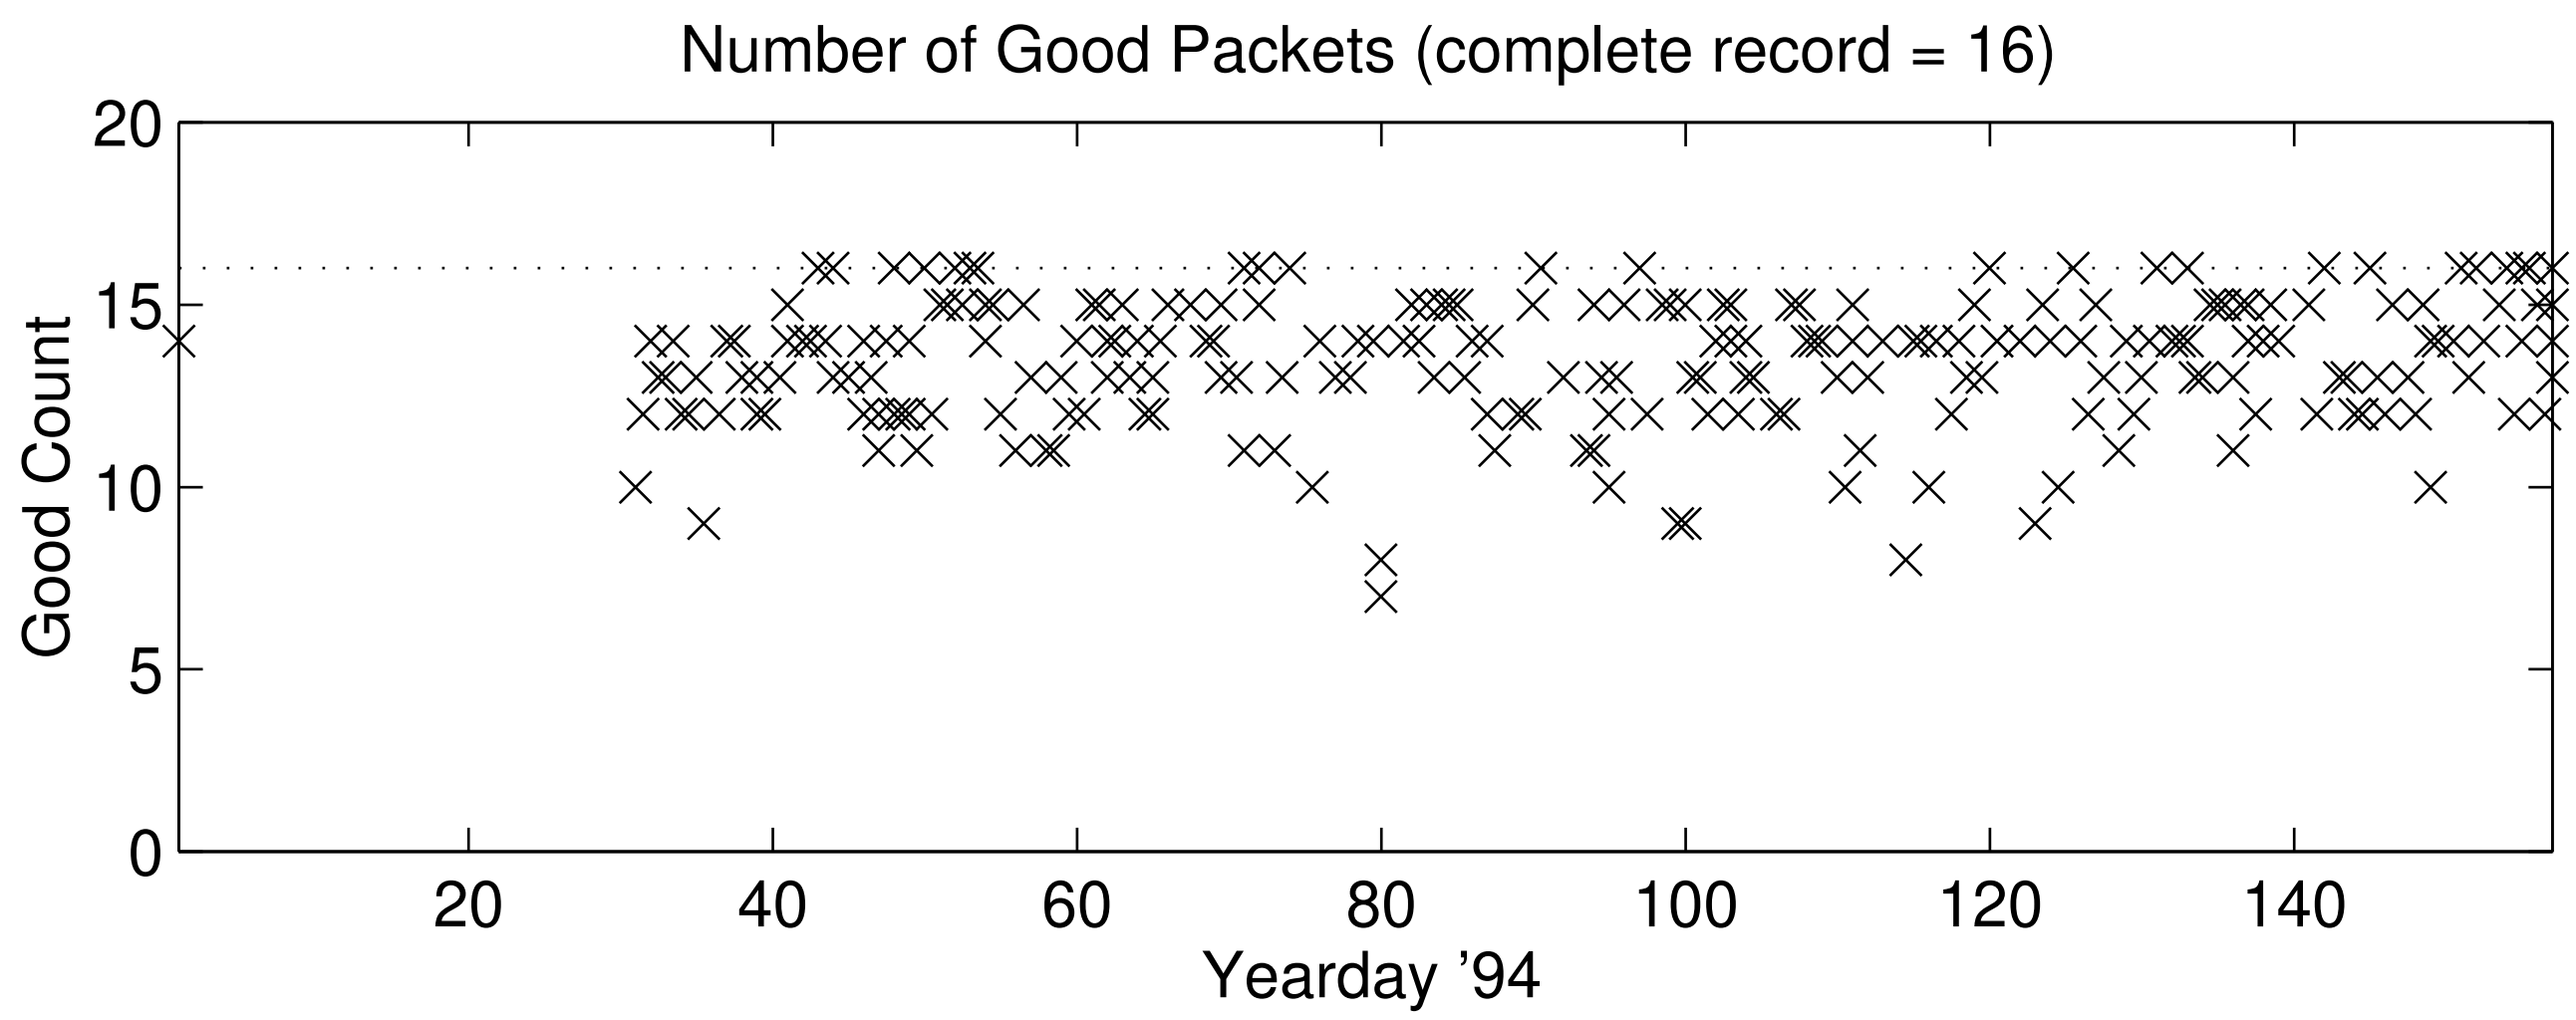

Number of Good Packets (complete record = 16)
Good Count
Yearday '94
0
5
10
15
20
20
40
60
80
100
120
140