


Impact of shelfbreak fronts on long-range underwater sound propagation in the continental shelf area

Ying-Tsong Lin¹, Alexey Shmelev¹, James F. Lynch¹,
Arthur E. Newhall¹, Pierre F. J. Lermusiaux²
and Glen Gawarkiewicz¹

1 Woods Hole Oceanographic Institution, Woods
Hole, MA

2 Massachusetts Institute of Technology,
Cambridge, MA




Work supported by ONR



3-D feature of the Shelfbreak front off New Jersey


Field observations during the SW06 experiment

RU COOL NOAA-12 Sea Surface Temperature September 09, 2006 1022 GMT

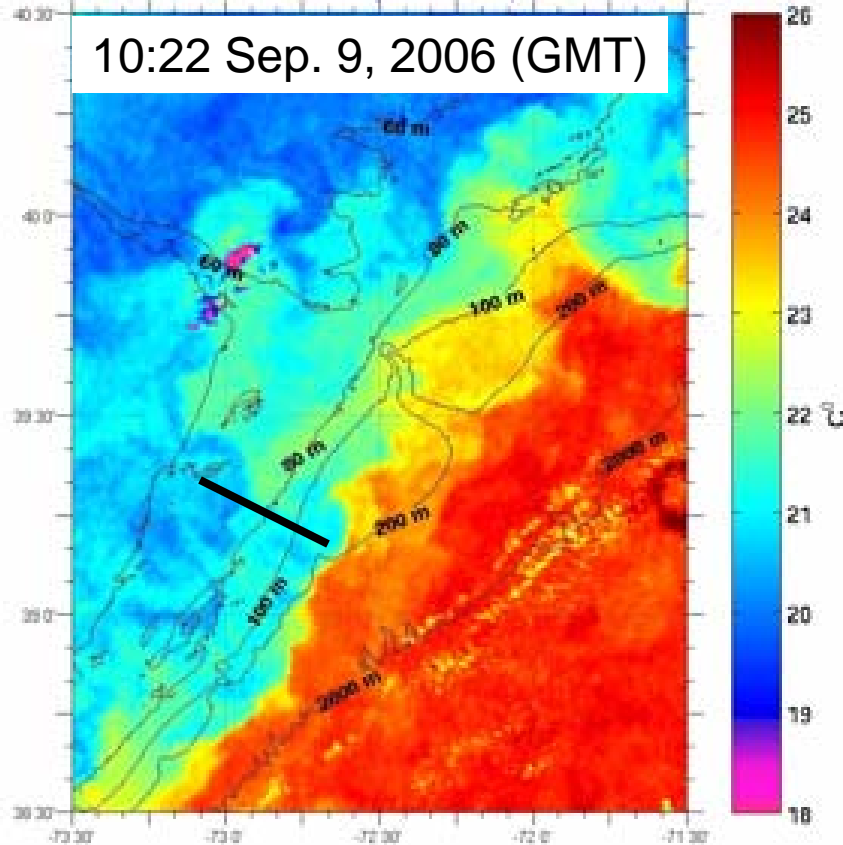

Sea Surface Temperature Satellite Image
2°x2° block centered at Hudson Canyon
The Coastal Ocean Observation Lab (COOL) at
Rutgers University, NJ

10:32 to 13:57, Sep. 9, 2006 (GMT)

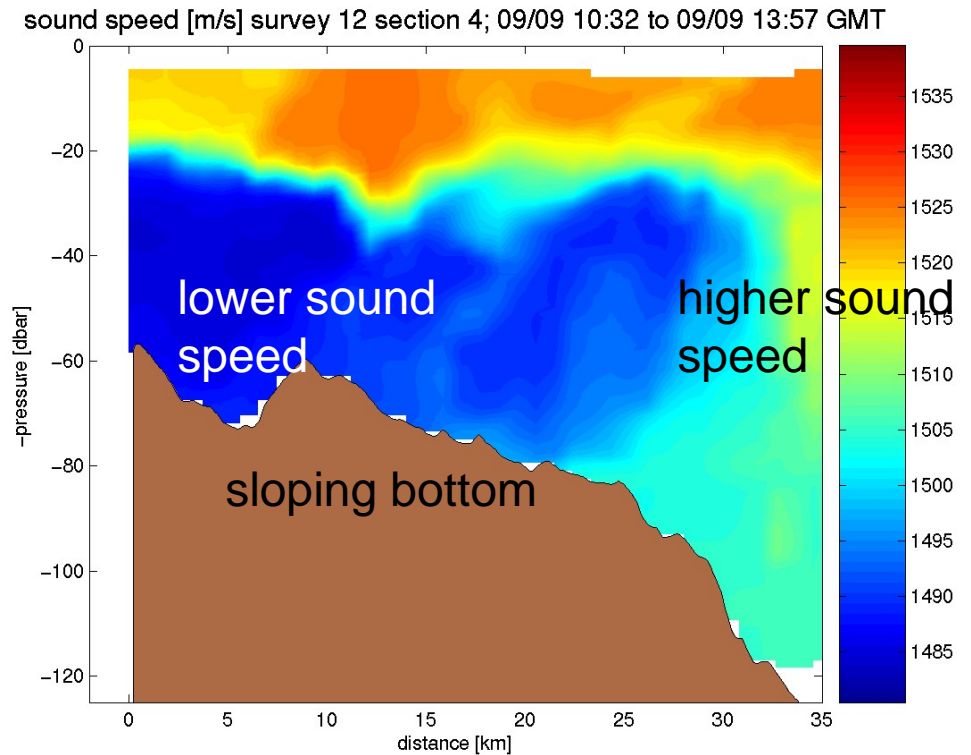

Vertical Structure

Scanfish sound speed data
Glen Gawarkiewicz, WHOI




3-D acoustic effects from shelfbreak fronts

Idealized model study:

3-D Rigid-Bottom Wedge with a Frontal Interface

- **Continuous wave signal propagation**

Source moves from the front to the wedge apex on the same θ angle, following the red line shown below.

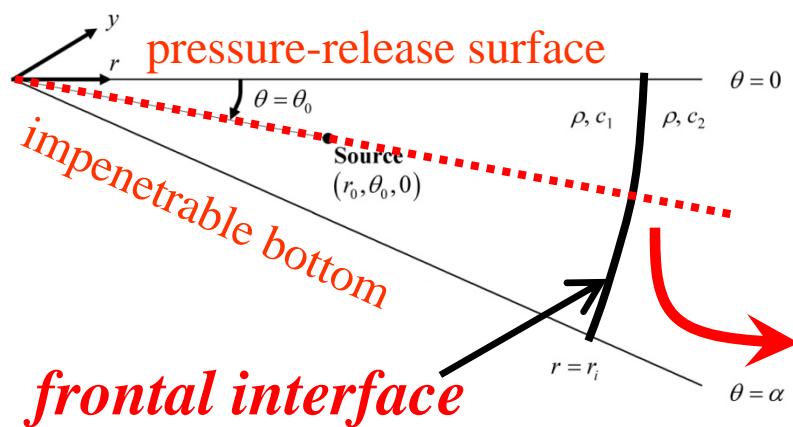


Slope angle $1/10^\circ$ ($\sim 1.75/1000$ slope)

Water sound speed

inside 1,500m/s, outside 1,530m/s


Normalized Frequency $1,500/\lambda_0$

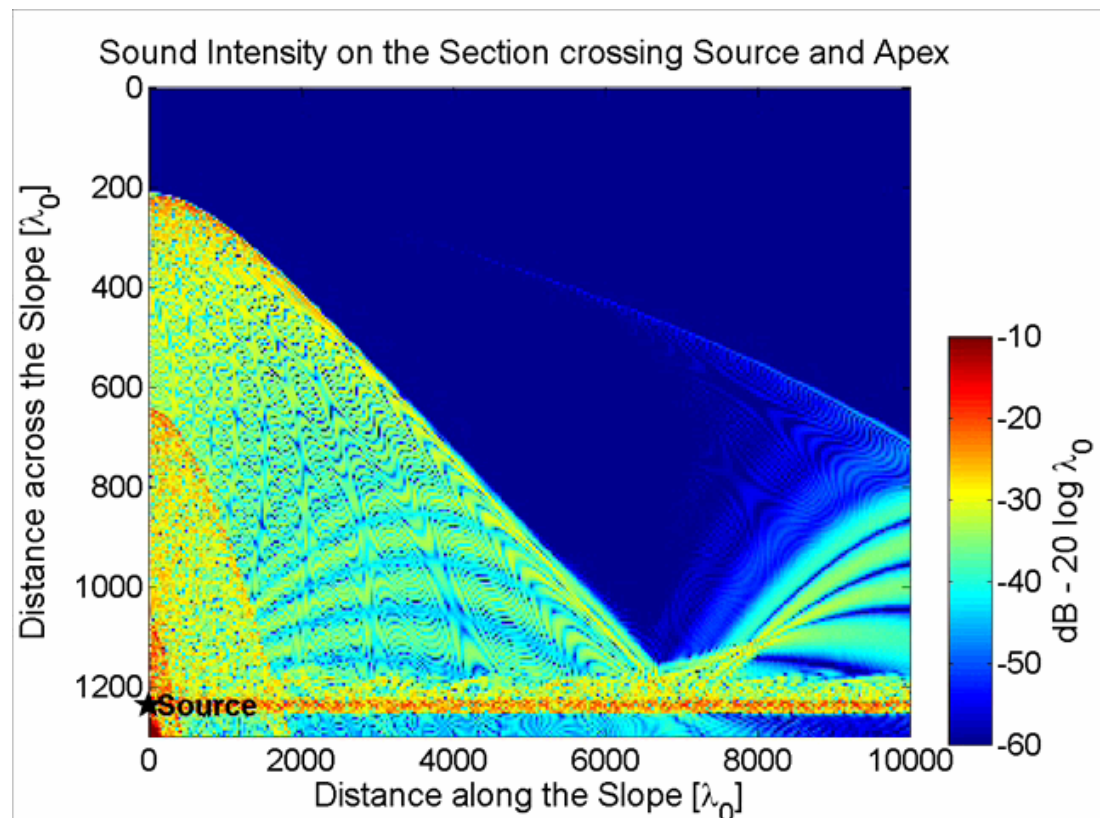

3-D feature of the Shelfbreak front off New Jersey


Field observations during the SW06 experiment

RU COOL NOAA-12 Sea Surface Temperature September 09, 2006 1022 GMT

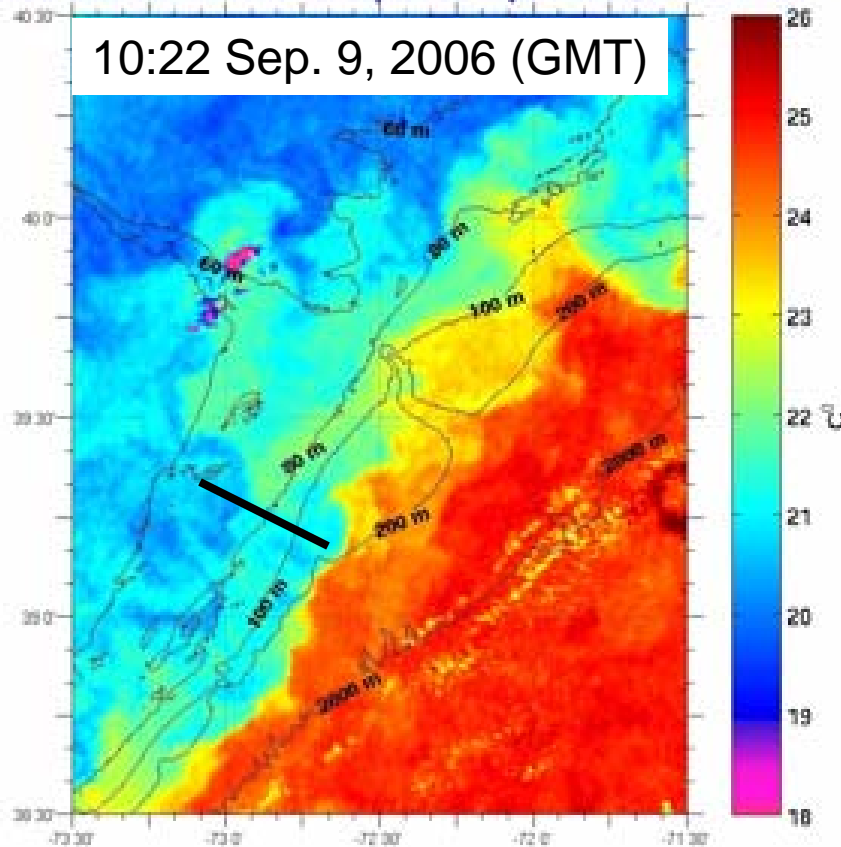

Sea Surface Temperature Satellite Image
2°x2° block centered at Hudson Canyon
The Coastal Ocean Observation Lab (COOL) at
Rutgers University, NJ

10:32 to 13:57, Sep. 9, 2006 (GMT)

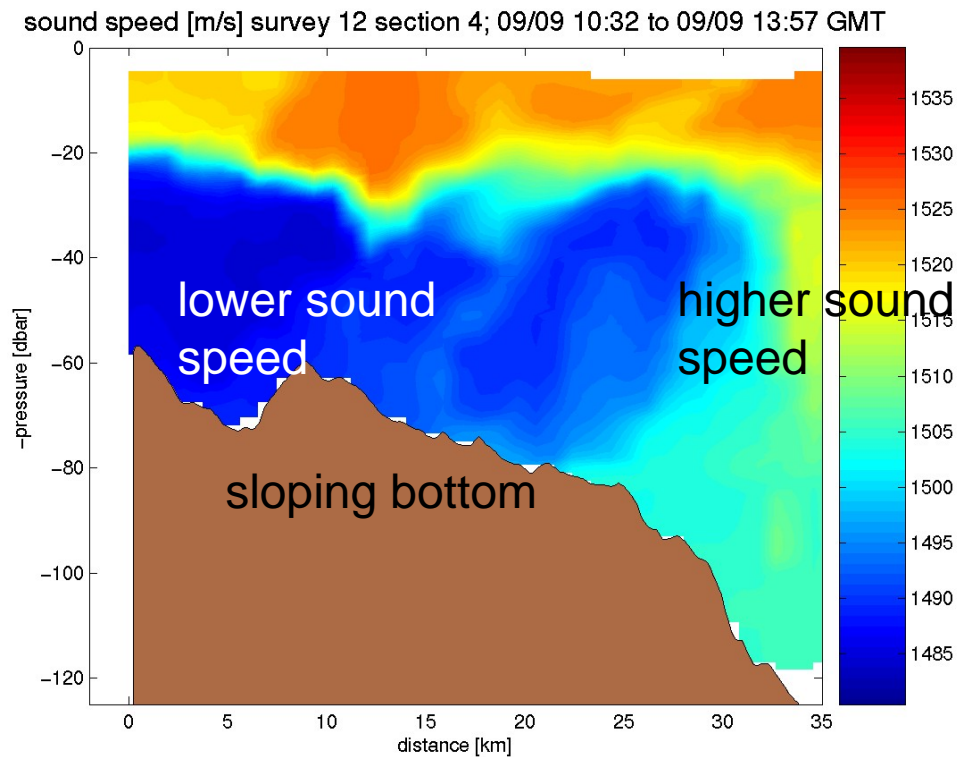

Vertical Structure


Scanfish sound speed data
Glen Gawarkiewicz, WHOI



Objective map of the Scanfish data in the SW06 experiment


Water temperature at 40 m depth

SW06 Scanfish Obj Map of Temperature at 40mZ for 9/9

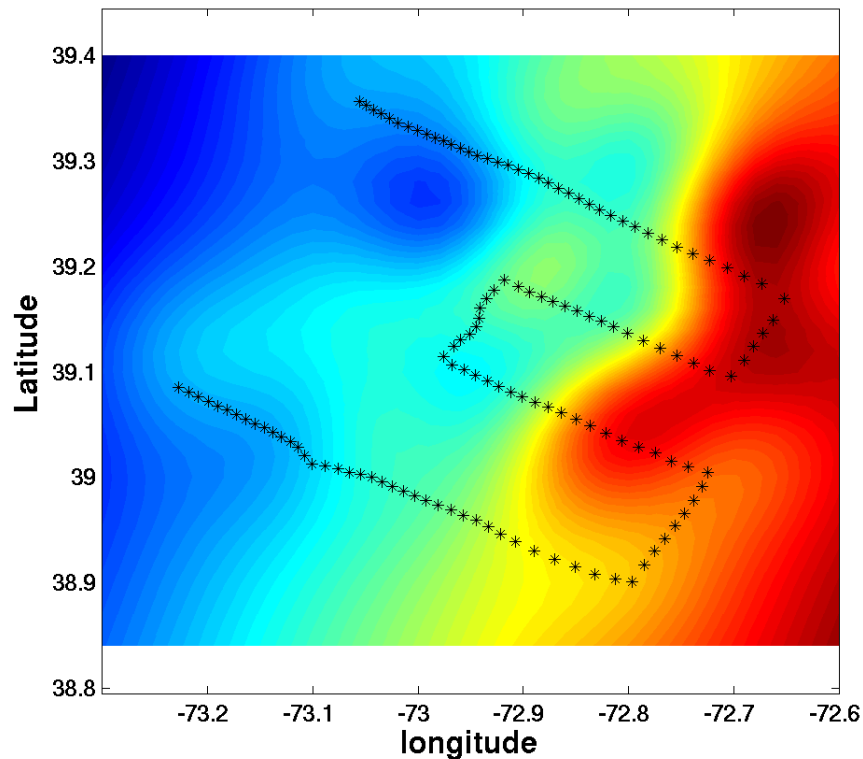

Phase speed of acoustic Mode 1 at 200 Hz


Phase Speed Gradient for Freq = 200Hz

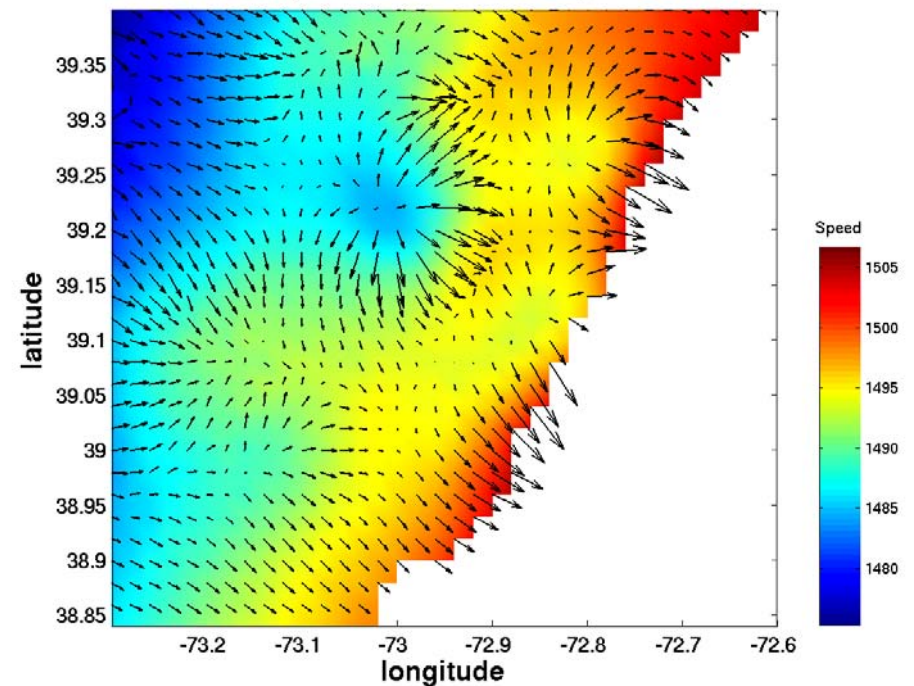

Realistic model study: 4-D Ocean Acoustic Field Prediction

- 4-D ocean fields from a data assimilation model (MIT - MSEAS)
by P. F. J. Lermusiaux are employed.

Sep 4
to Sep 7

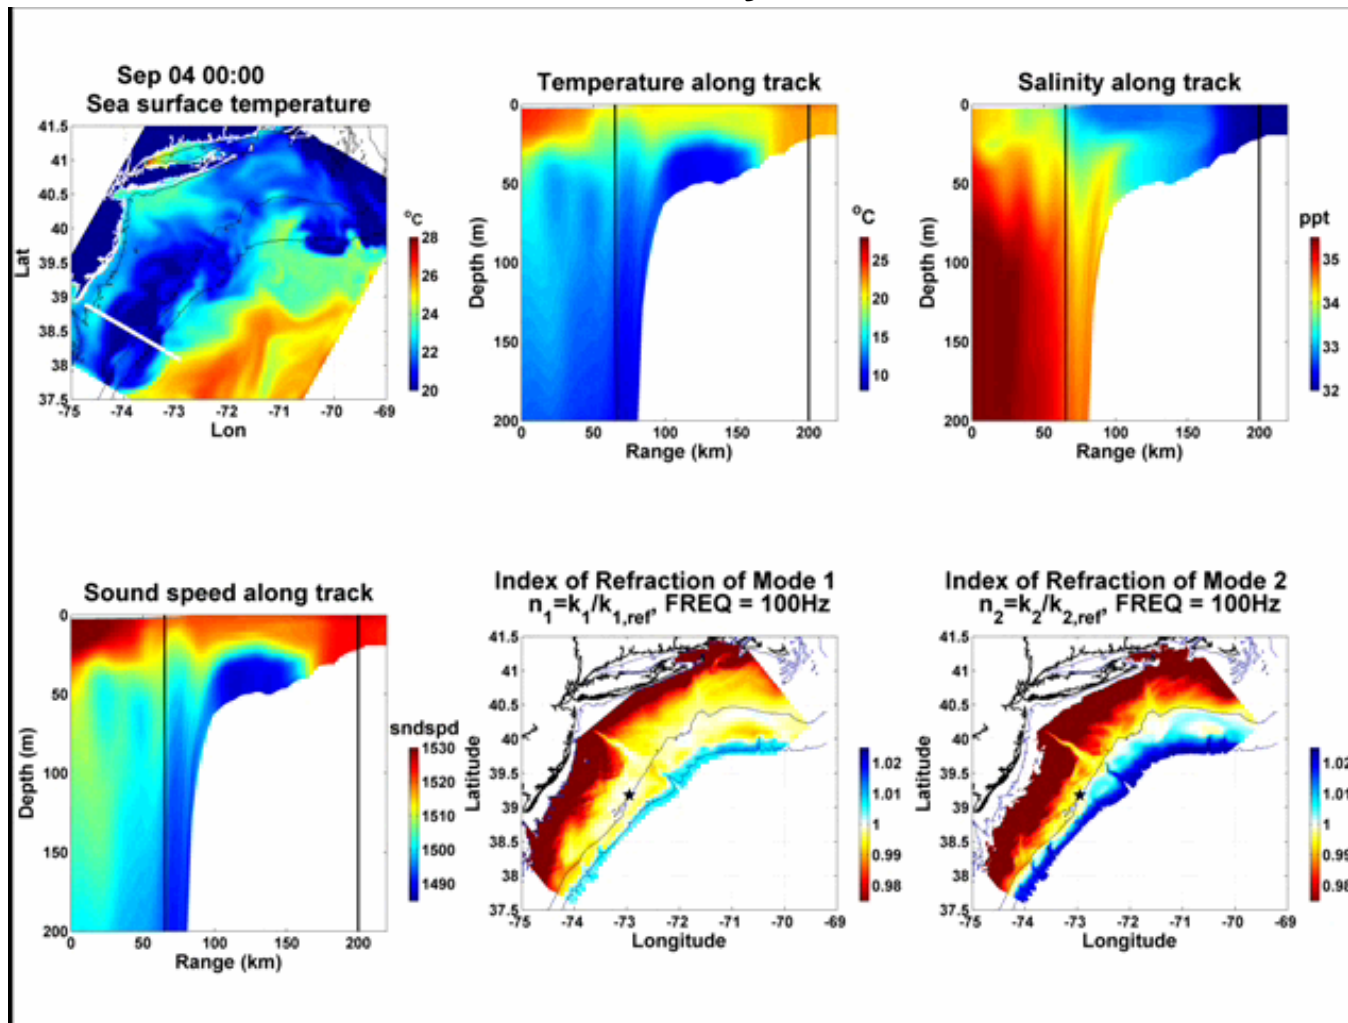

- Acoustic normal mode wavenumbers are calculated, and the indices of modal refraction are presented in the lower-right two panels. The modal phase speeds in red areas are faster, which cause acoustic modes to refract away and propagate toward lower phase speed areas (blue and white areas).

3-D Adiabatic mode solution

$$\rho(\vec{r}) \nabla \cdot \left(\frac{1}{\rho(\vec{r})} \nabla P(\vec{r}) \right) + k^2(\vec{r}) P(\vec{r}) = -4\pi \delta(\vec{r} - \vec{r}_s) \quad \text{3-D wave equation}$$

$$P(x, y, z) = \sum_m \Gamma_m(x, y) \Psi_m(x, y, z) \quad \text{vertical mode decomposition}$$

vertical modes satisfy the next normal mode equation

$$\rho(z) \frac{d}{dz} \left(\frac{1}{\rho(z)} \frac{d}{dz} \Psi_m(x, y, z) \right) + \left(\frac{\omega^2}{c^2(x, y, z)} - \xi_m^2(x, y) \right) \Psi_m(x, y, z) = 0$$







2-D wave equation for the modal amplitude

$$\left(\frac{d^2}{dx^2} + \frac{d^2}{dy^2} \right) \Gamma_m + \xi_m^2(x, y) \Gamma_m = -4\pi \frac{\Psi_m(x_s, y_s, z_s)}{\rho(z_s)} \delta(x - x_s) \delta(y - y_s)$$

- Utilize 2-D PE to solve modal amplitude equation to include horizontal refraction
- WKB solution of neglecting horizontal refraction $\Gamma_m(r) \approx \sqrt{\frac{2\pi}{k_n(r) \cdot r}} \cdot \frac{\Psi_m(x_s, y_s, z_s)}{\rho(z_s)} \cdot e^{i\frac{\pi}{4} + i \int k_n(r) dr}$

Modal TL Calculations

Case 1: SW06 Acoustic Site

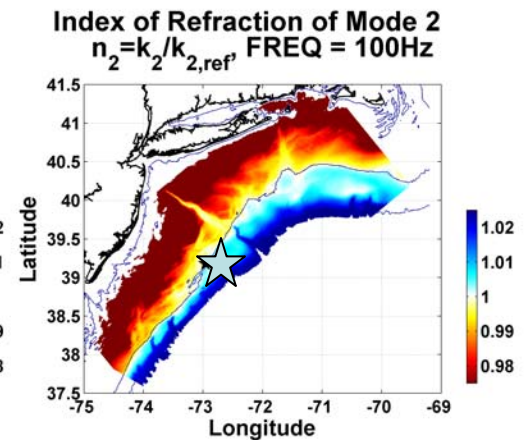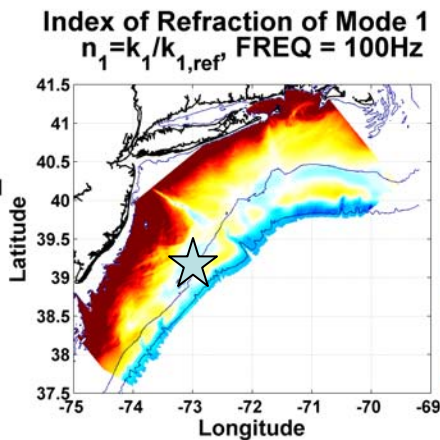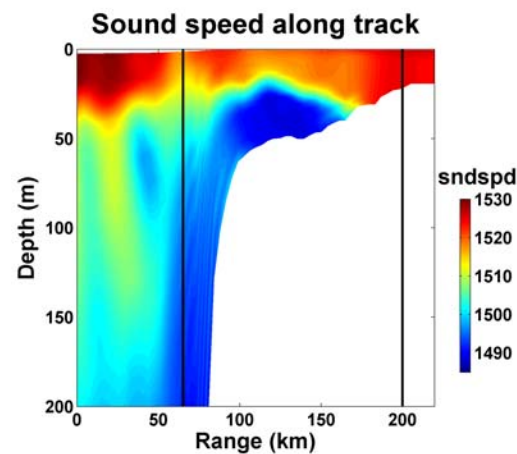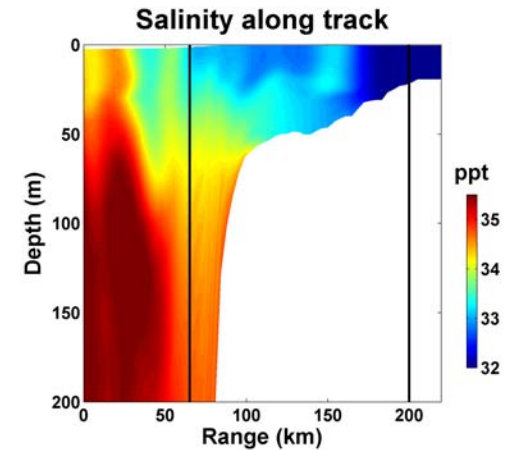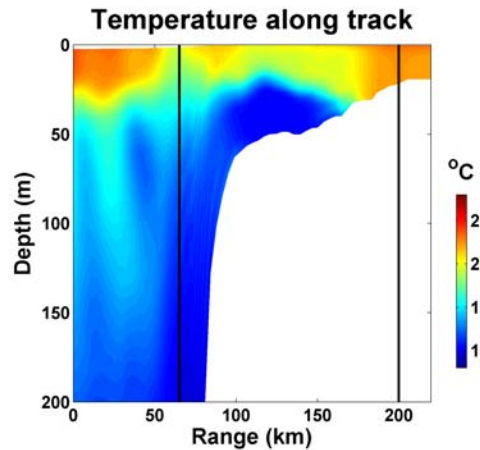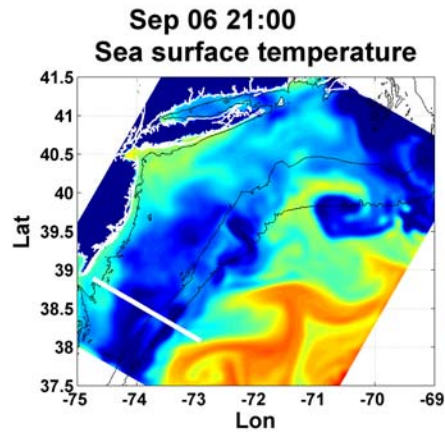

Realistic model study: 4-D Ocean Acoustic Field Prediction

- Modal intensities predicted by the vertical modes and horizontal PE approach

CASE 1: SW06 Acoustic Site (Source Frequency 100 Hz)

Mode 1 intensities (contours), plotted along with modal refractive index


Mode 1 TL (100.00 Hz), 04-Sep-2006 00:00:00

Red lines: 3D Adiabatic mode solution

Black lines: 2D Adiabatic mode solution

Bathymetry contours: 40, 80, 100, 200, 500, 1000 and 1500 m

TL dB contours (dark lines): -60, -54, -48, -42 and -36 dB

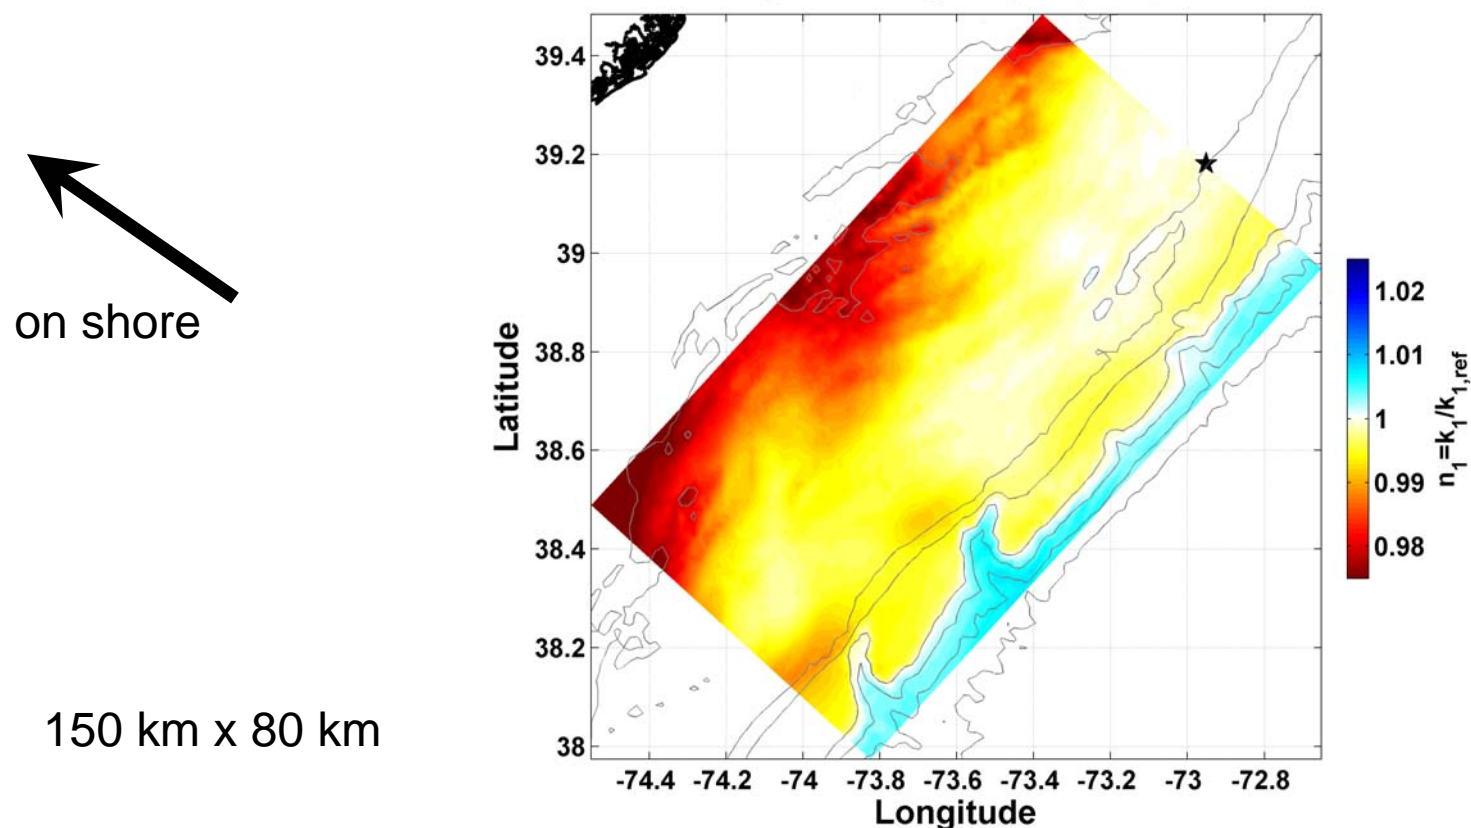

Realistic model study: 4-D Ocean Acoustic Field Prediction

- Modal intensities predicted by the vertical modes and horizontal PE approach

CASE 1: SW06 Acoustic Site (Source Frequency 100 Hz)

Mode 1 intensities (contours), plotted along with modal refractive index


Mode 1 TL (100.00 Hz), 04-Sep-2006 00:00:00

Red lines: 3D Adiabatic mode solution

Black lines: 2D Adiabatic mode solution

Bathymetry contours: 40, 80, 100, 200, 500, 1000 and 1500 m

TL dB contours (dark lines): -60, -54, -48, -42 and -36 dB

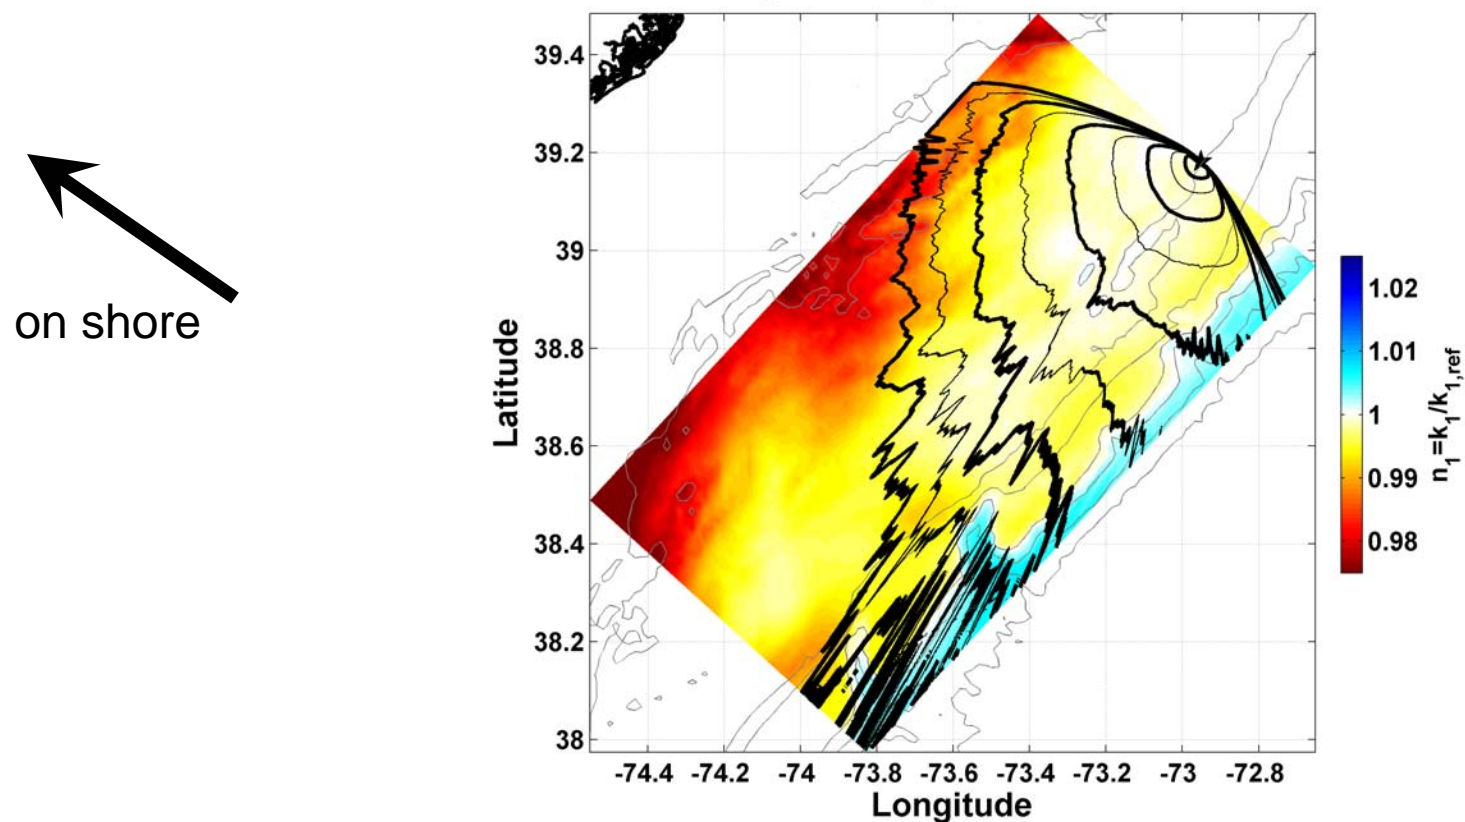

Realistic model study: 4-D Ocean Acoustic Field Prediction

- Modal intensities predicted by the vertical modes and horizontal PE approach

CASE 1: SW06 Acoustic Site (Source Frequency 100 Hz)

Mode 1 intensities (contours), plotted along with modal refractive index


Mode 1 TL (100.00 Hz), 04-Sep-2006 00:00:00

Red lines: 3D Adiabatic mode solution

Black lines: 2D Adiabatic mode solution

Bathymetry contours: 40, 80, 100, 200, 500, 1000 and 1500 m

TL dB contours (dark lines): -60, -54, -48, -42 and -36 dB

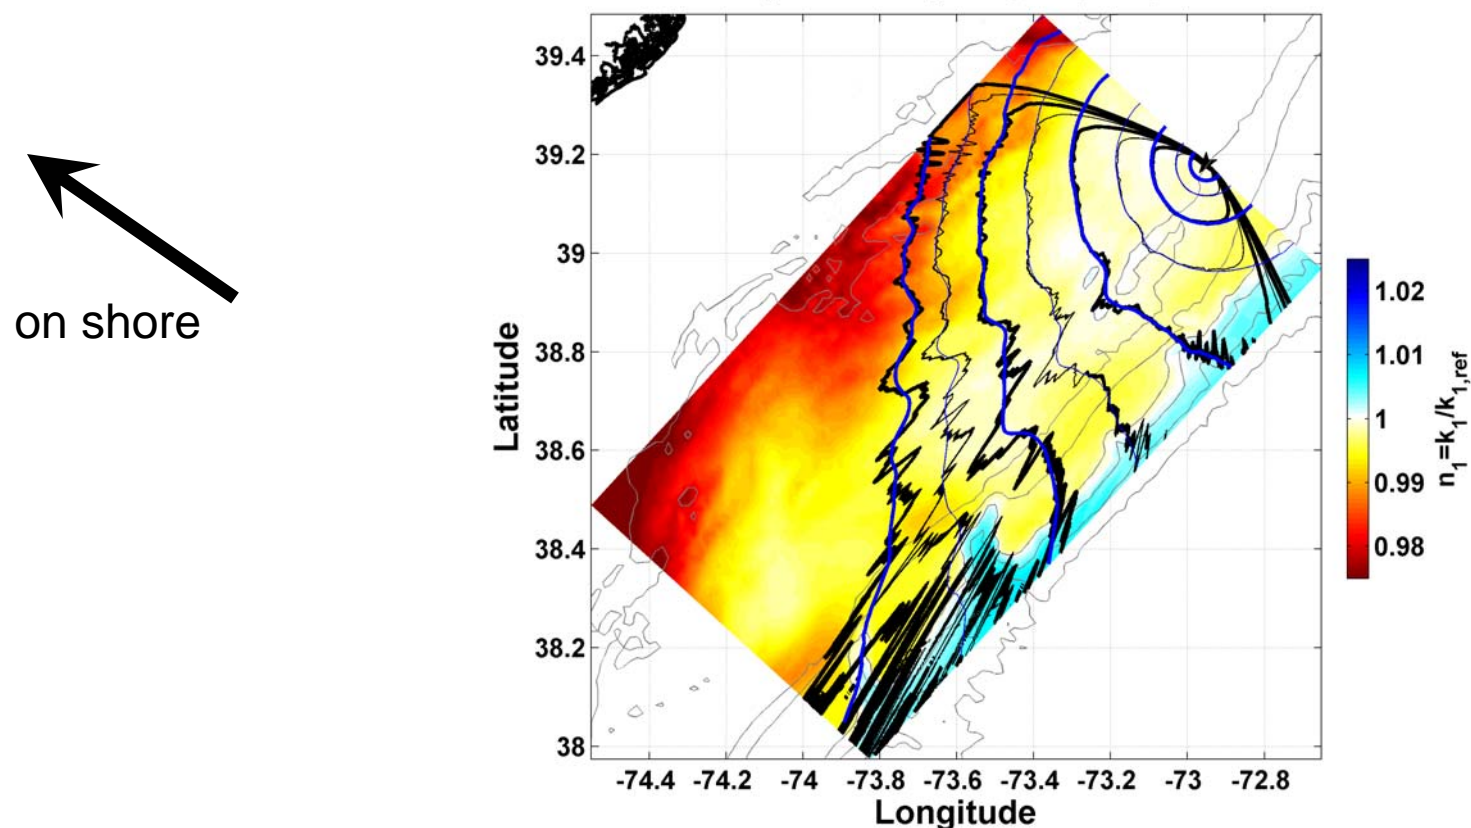


Realistic model study: 4-D Ocean Acoustic Field Prediction

- Modal intensities predicted by the vertical modes and horizontal PE approach







CASE 1: SW06 Acoustic Site (Source Frequency 100 Hz)

Mode 1 intensities (contours), plotted along with modal refractive index

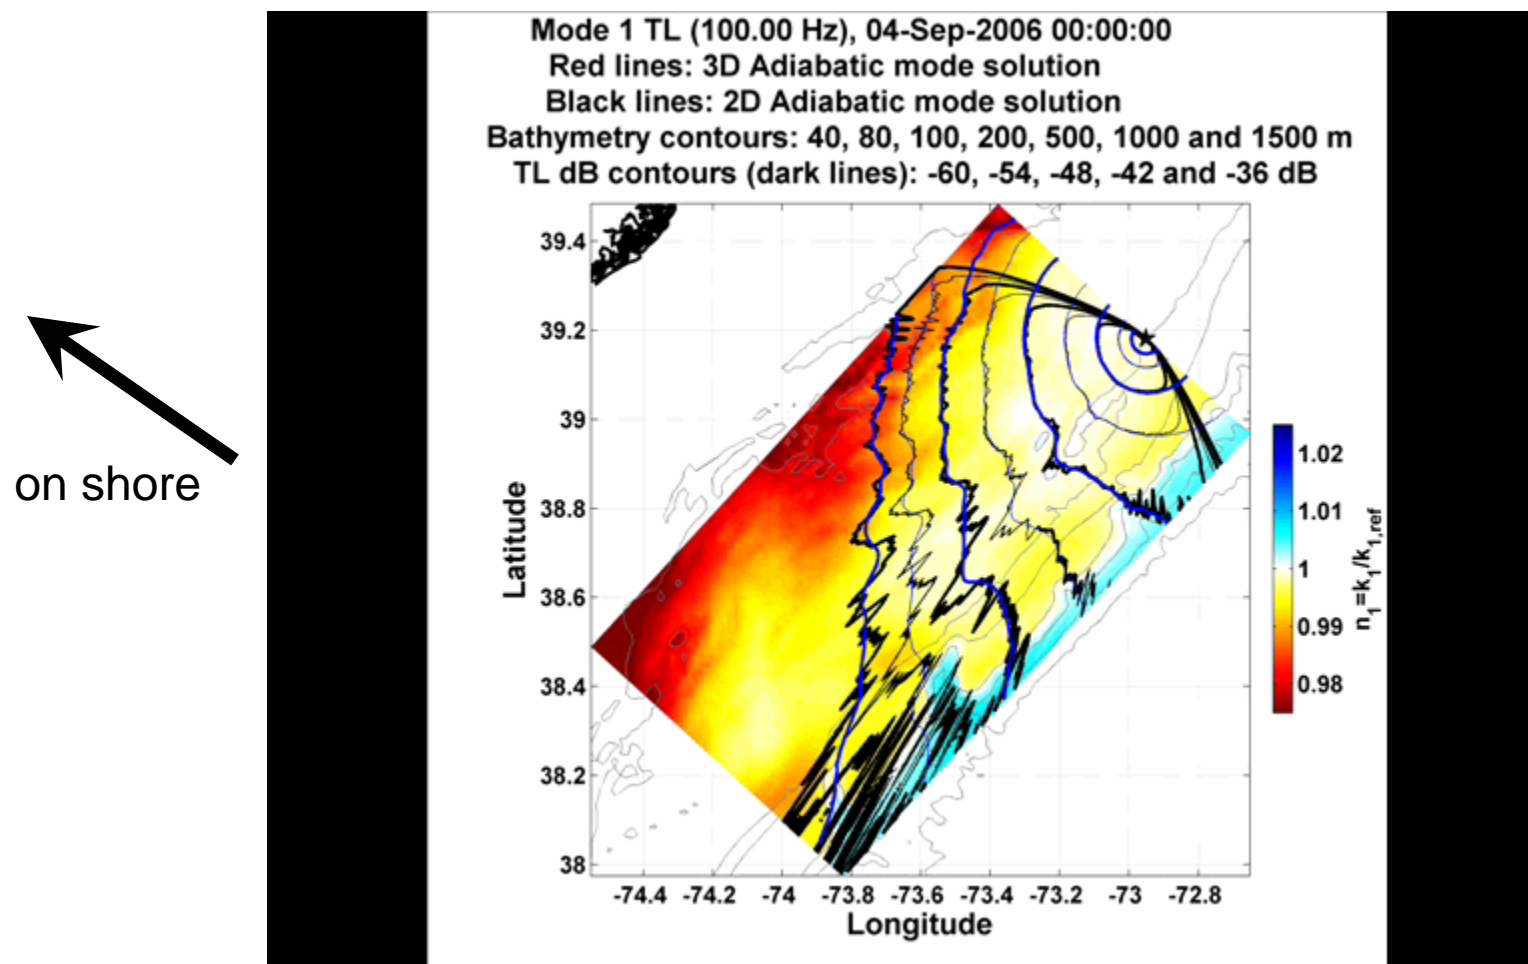

Modal TL Calculations

Case 2: Cold Pool

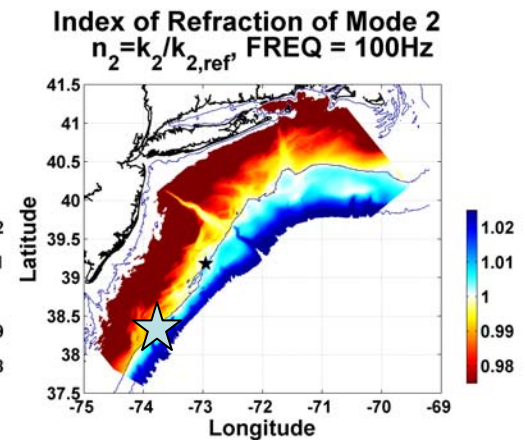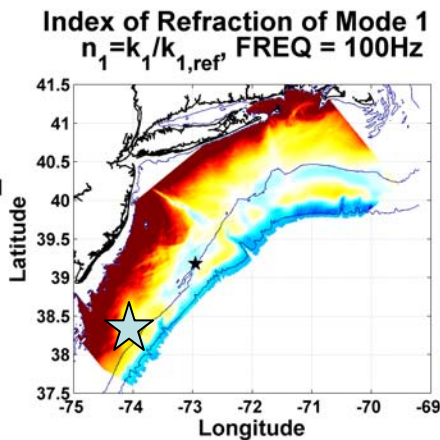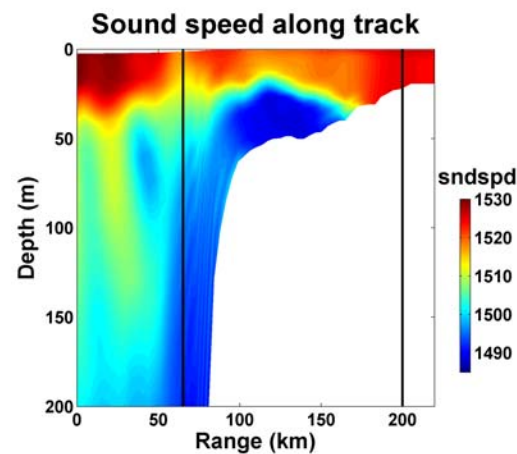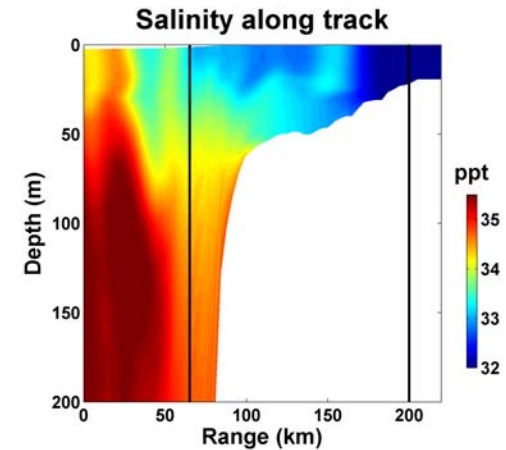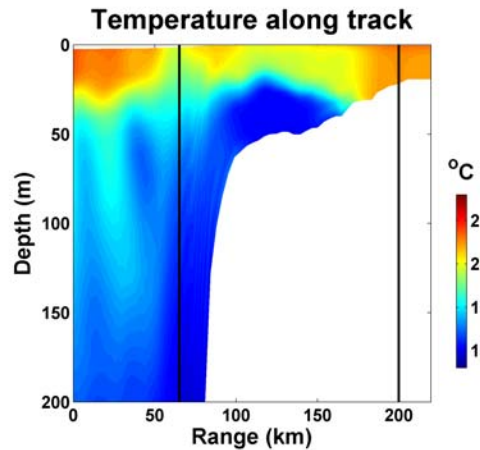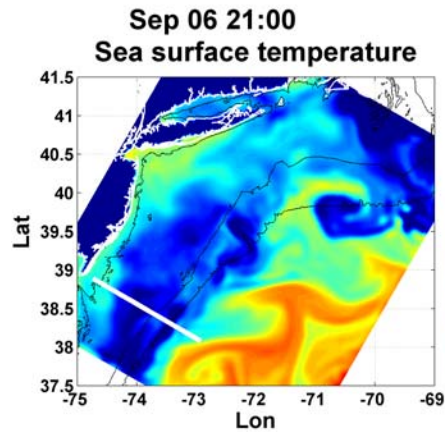


Realistic model study: 4-D Ocean Acoustic Field Prediction

- Modal intensities predicted by the vertical modes and horizontal PE approach

CASE 2: Mesoscale Eddy (Source Frequency 100 Hz)

Mode 1 intensities (contours), plotted along with modal refractive index

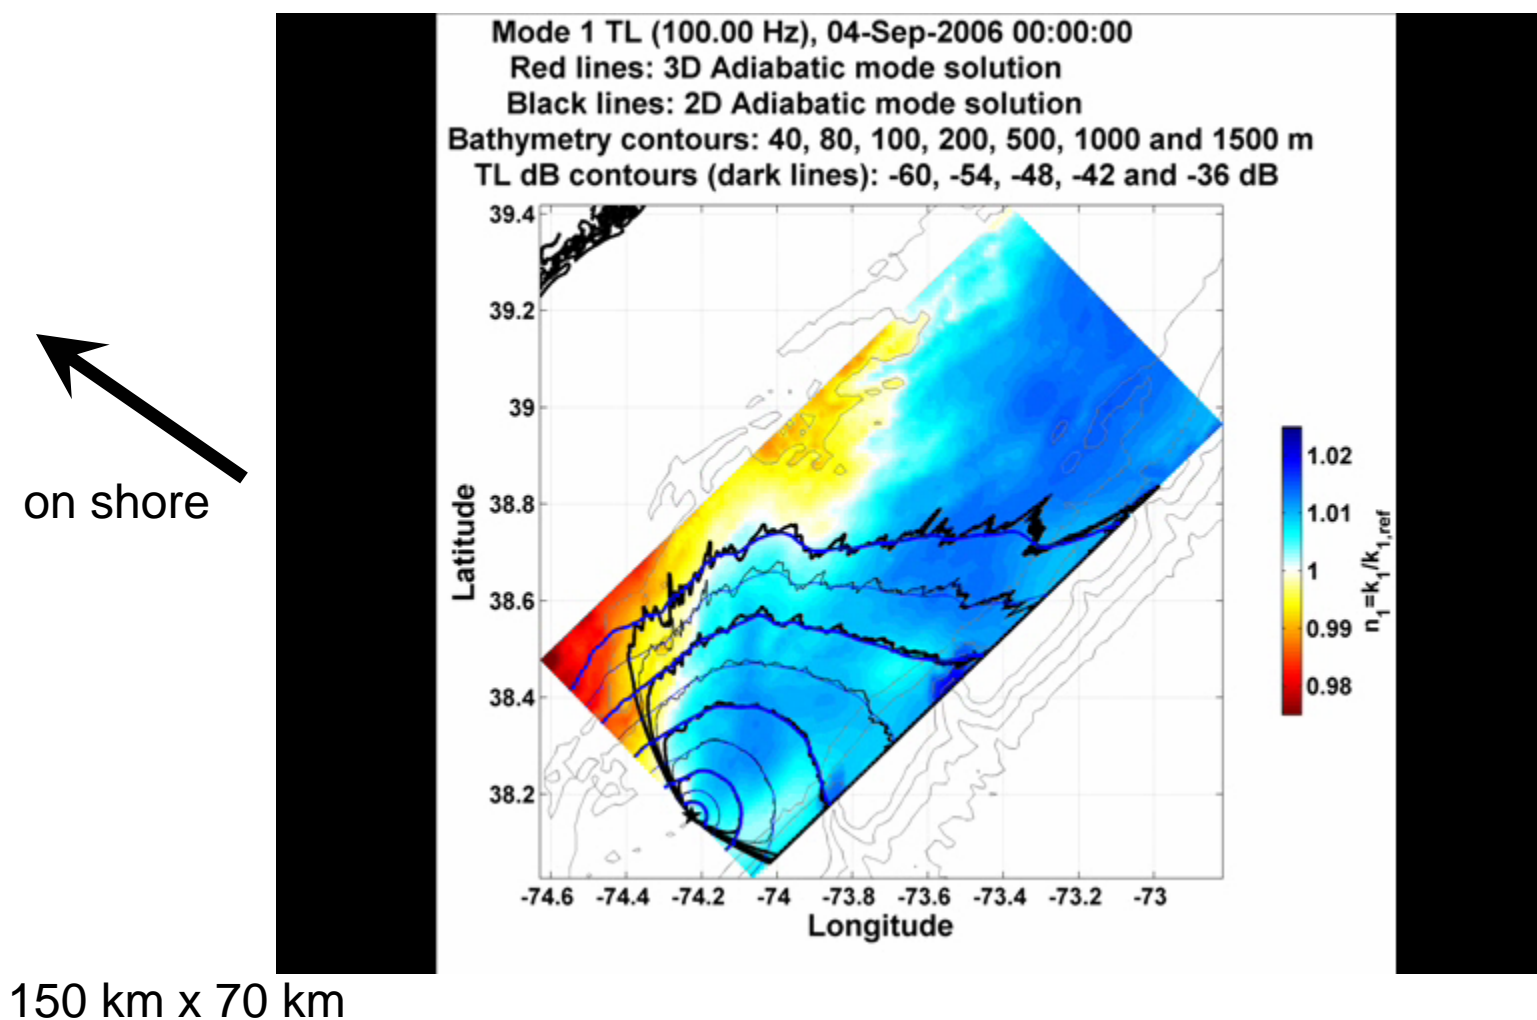


Realistic model study: 4-D Ocean Acoustic Field Prediction

- Modal intensities predicted by the vertical modes and horizontal PE approach

CASE 3: Bottom (Source Frequency 100 Hz)

Mode 1 intensities (contours), plotted along with modal refractive index

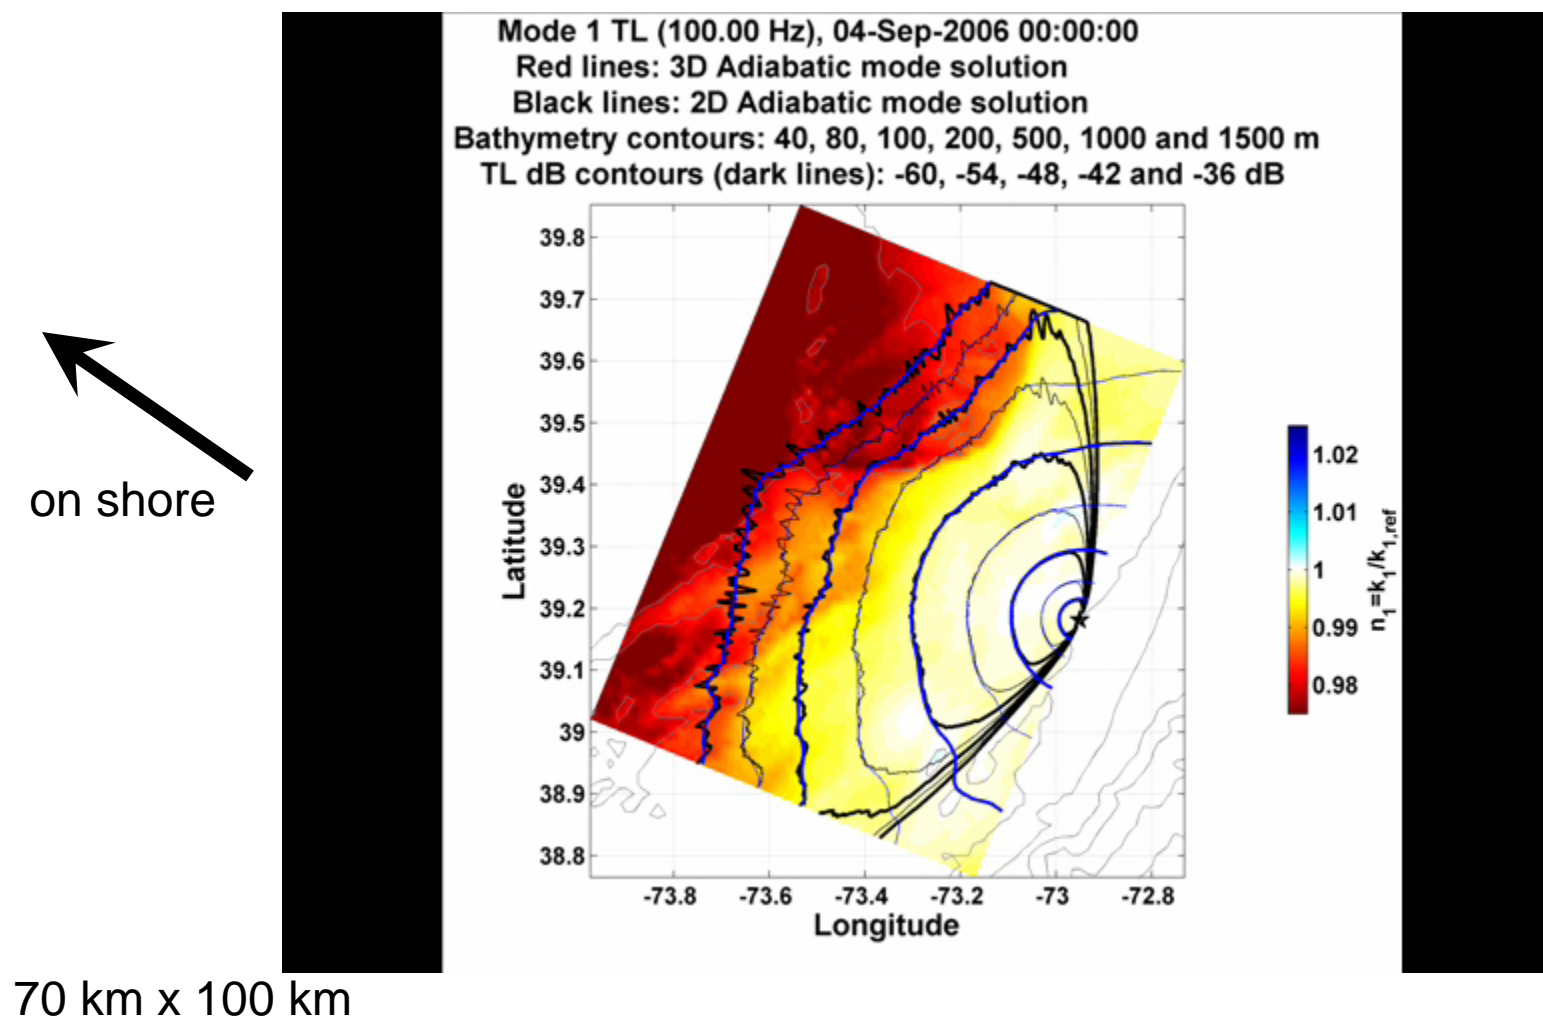


Realistic model study: 4-D Ocean Acoustic Field Prediction

- Modal intensities predicted by the vertical modes and horizontal PE approach

CASE 3: Bottom (Source Frequency 100 Hz)

Mode 1 intensities (contours), plotted along with modal refractive index

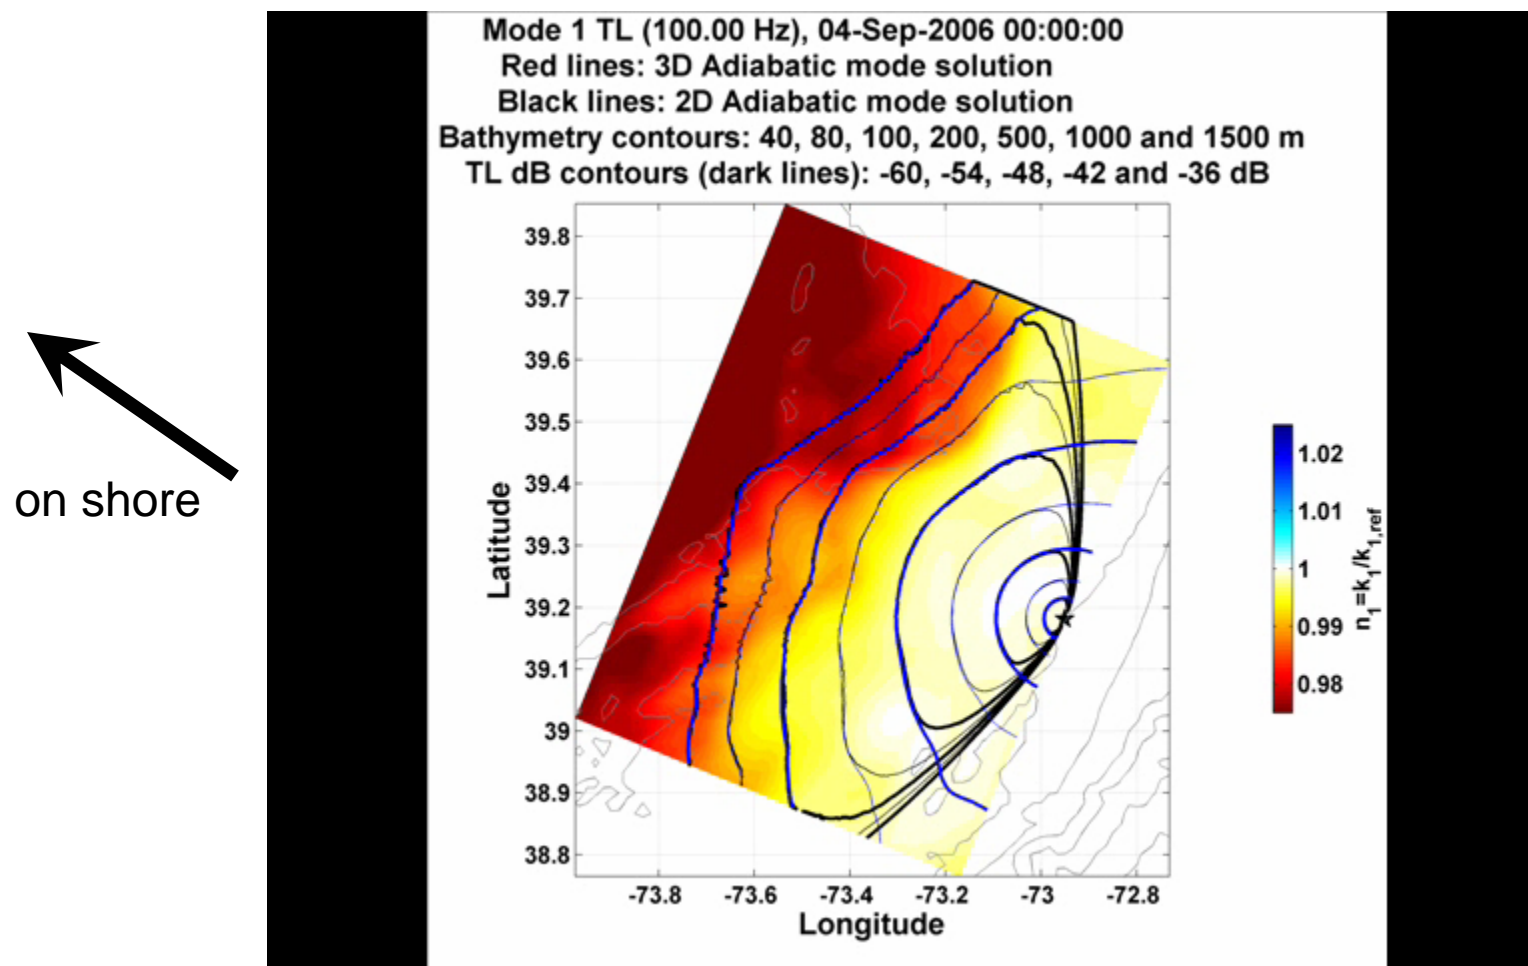

Summary

- Joint 3-D acoustic effects from shelfbreak fronts and bathymetry/slope
- Realistic ocean model from the MIT-MSEAS has been employed, and an approach of vertical modes and horizontal PE enables us to investigate 3-D normal mode propagation on the continental shelf area.

Future work

- We need higher ocean model resolution.
- Full 3-D calculation to capture the 3-D mode coupling